









Versiune	Sisteme integrate de gătit 84 cm - 600 m ³ /h
Design	Falmec Lab Sisteme integrate de gătit Sticlă ceramică neagră Automode (reglarea aspirației în funcție de gătit) Sistem de clapetă motorizat Colector de lichid vidabil Rama zonei de admisie din oțel negru mat cu tratament anti-zgârieturi Tehnologia Flex Surface
Control	Glisor tactil 9 niveluri de gătit + boost
Modul	Filtering
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru combinat Carbon.Zeo, regenerabil
Power	Power level management from 2.8kW to 7.4kW
Motor	Motor fără perii
Dimensions	84 cm
Cooking Functions	Cronometru de sfârșit al gătitului pentru fiecare zonă Funcția de rechemare Funcția Keep Warm (44°) Detectarea automată a vasului Blocare control / siguranță pentru copii Funcția de pauză Funcția de punte dublă
Notes	
Tensiune/frecvență	7560 W 220-240V 50-60Hz
Motor	Motor fără perii 600 m ³ /h 495 m ³ /h I.E.C.61591 64 dB (A)re1pW I.E.C. 60704-2-13 A+
Net Weight	31.6 kg 25.5 kg 0.24 m ³ L 1055 x H 392 x P 610 mm







Accessorii optionale

Code	Description
KACL.963	Carbon and Zeolite anti-odor filter
KACL.155#NF	Cadru negru - 84 cm

<i>Viteza motorului</i>	1	5	9	10
	46	-	64	69
	170	310	390	495
	80	220	420	640
	11	32	74	131
<i>leșire aer</i>	220x90	220x90	220x90	220x90

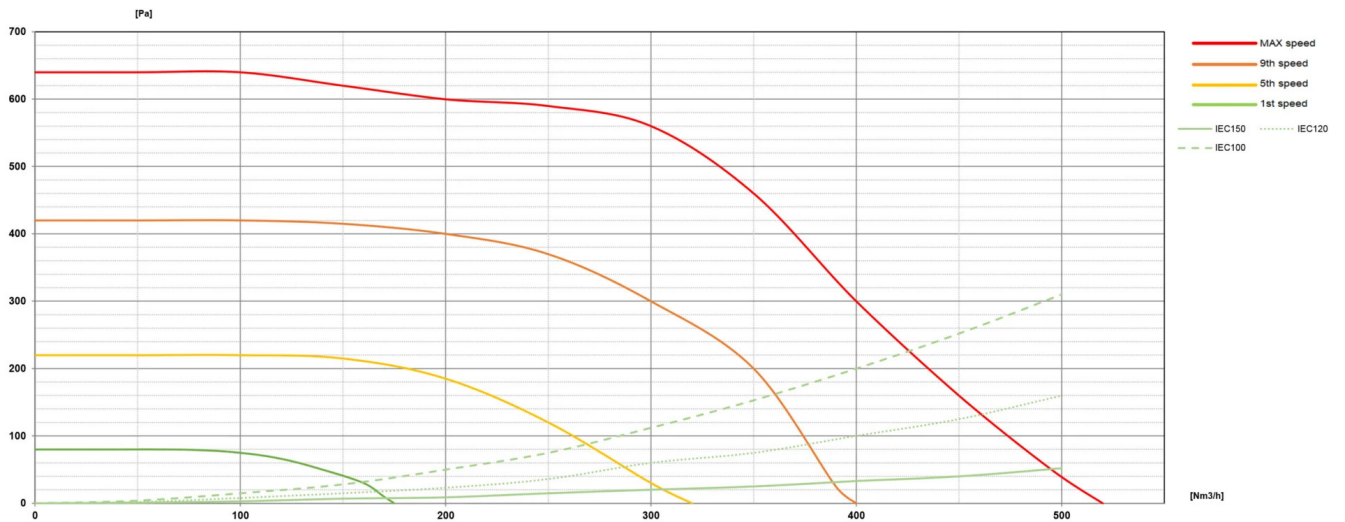

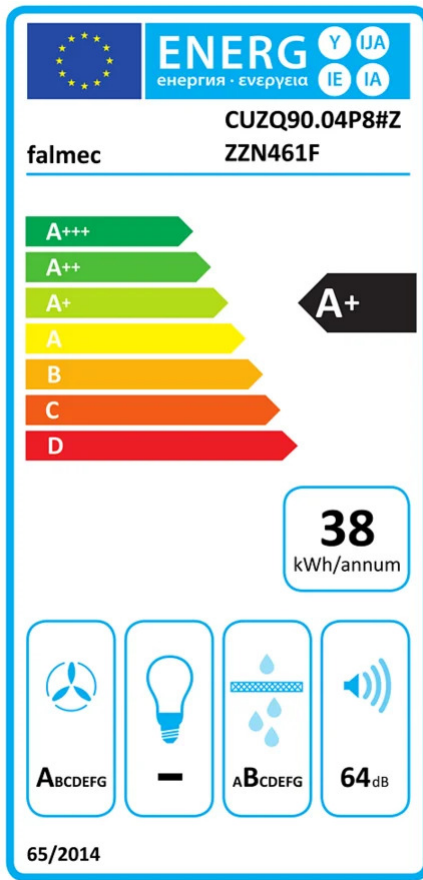

PF		
S	Falmecc Lab	
M	Sisteme integrate de gătit 84 cm - 600 m ³ /h	
AEC	38.30	kWh/a
EEC	A+	
FDE	33.10	
FDEC	A	
LE	0.00	
LEC		
GFE	87	
GFEC	B	
Qmin	170	m ³ /h
Qmax	390	m ³ /h
Qboost	495	m ³ /h
SPEmin	46	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO		
PS	0.48	W
PI		
F	0.80	
EEL	43.80	
Qbep	267	m ³ /h
Pbep	584	Pa
Qboost	495	m ³ /h
Wbep	131	W

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.