



Versiune	Plafon 90 cm - LED - alb
Design	Falmec Lab Design
	Oțel cu finisaj alb Sticlă Aspirație perimetrală Iluminare difuză pe întreaga suprafață
Control	Panou de control electronic Telecomandă inclusă Dialogue system cu mod automat
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Strip LED - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru combinat Carbon.Zeo, regenerabil (opțional) Filtru Regenerable Carbon.Zeo Microtech (opțional)
Motor	Motor vândut separat
Dimensions	90 cm 150 cm 150 cm
Notes	Dimensiune decupaj: 505x940 mm
	35 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	Motor subțire 800 m3/h Motor de acoperis 950 m3/h Remote under-roof 1100 m3/h Brushless 695 m³/h I.E.C.61591 62 dB (A)re1pW I.E.C. 60704-2-13 B
Net Weight	30.4 kg 27.2 kg 0.17 m3 L 1120 x H 222 x P 670 mm





Nuvola Led 90 - under roof motor

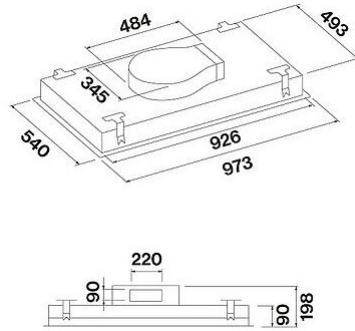

Nuvola Led 90 - slim motor


Accessorii optionale

Code	Description
KACL.789	Junction for ceiling hoods
KACL.396	Flanșă - Ø200
KACL.782#49F	Motor subțire 800 m3/h
KACL.798#41F	Motor de acoperis 950 m3/h
KACL.786#41F	Motor de exterior 1000 m3/h
KACL.796#4AF	Motor de exterior 1500 m3/h
KACL.797#4AF	Motor de acoperis 1300 m3/h
KACL.939#BF	Kit de filtrare pentru verisunea recirculare in plafon (doar pentru Motorul Slim)
KACL.953#BF	Carbon.Zeo vertical outlet ceiling filter unit kit
KACL.398	Ø150 - Flange
KACL.1049	Carbon.Zeo Microtech filtru regenerabil pentru hote de plafon de până la 100 cm
KACL.1064#BF	

MOTOR SUBTIRE 800 M3/H

CARATTERISTICHE TECNICHE MOTORE


	1	2	3	4
	52	58	63	66
	245	350	470	540
	400	480	530	600
	100	110	120	150
	220x90	220x90	220x90	220x90

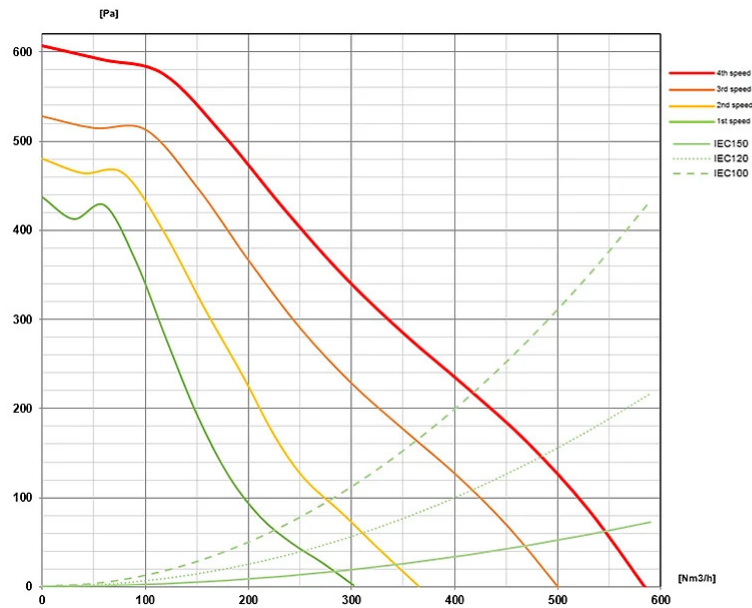

MOTOR DE ACOPERIS 950 M3/H

CARATTERISTICHE TECNICHE MOTORE


	1	2	3	4
	48	56	62	66
	365	480	600	695
	510	520	560	590
	190	220	250	270
	150	150	150	150

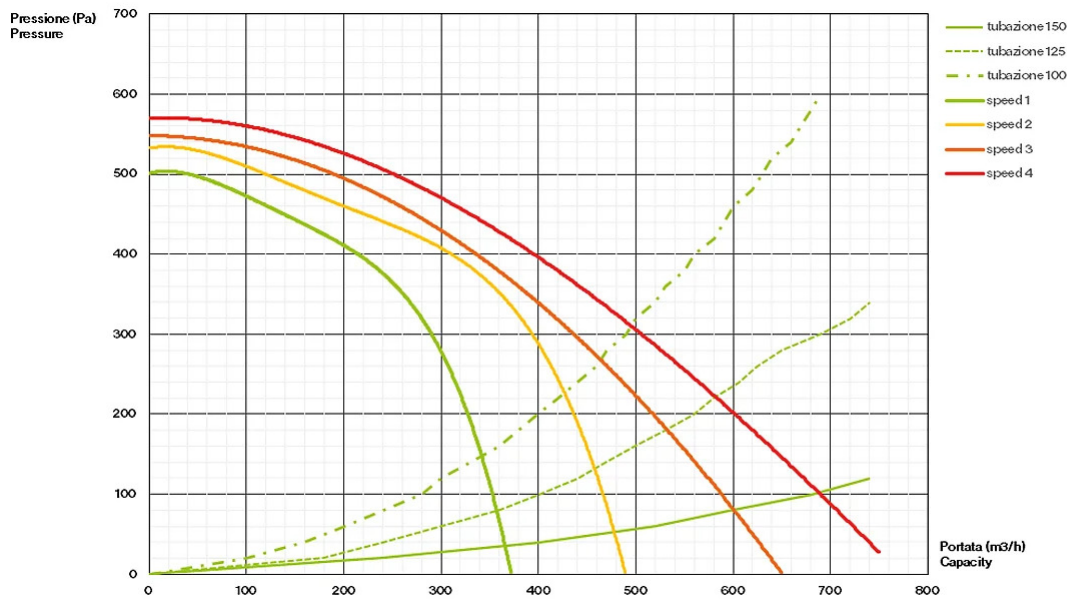


REMOTE UNDER-ROOF 1100 M3/H BRUSHLESS

CARATTERISTICHE TECNICHE MOTORE

	1	2	3	4
	53	62	66	69
	360	500	650	850
	340	480	490	500
	-	-	-	230
	150	150	150	150

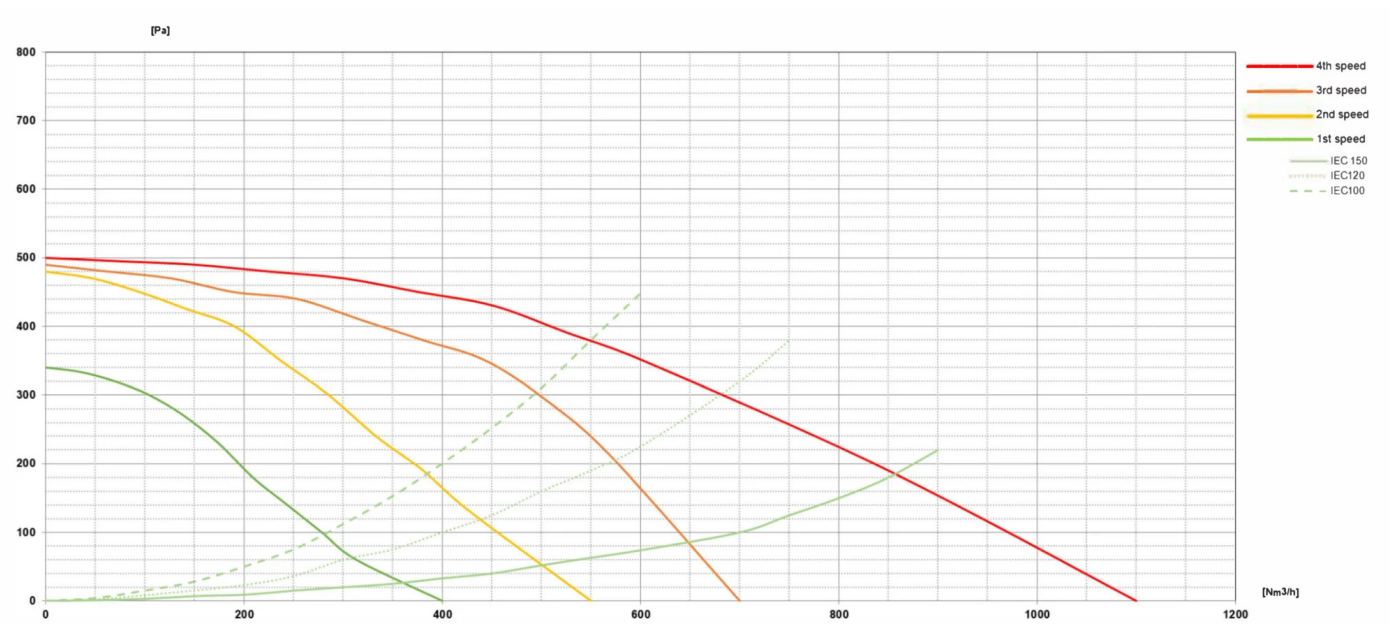

MOTOR DE ACOPERIS 950 M3/H

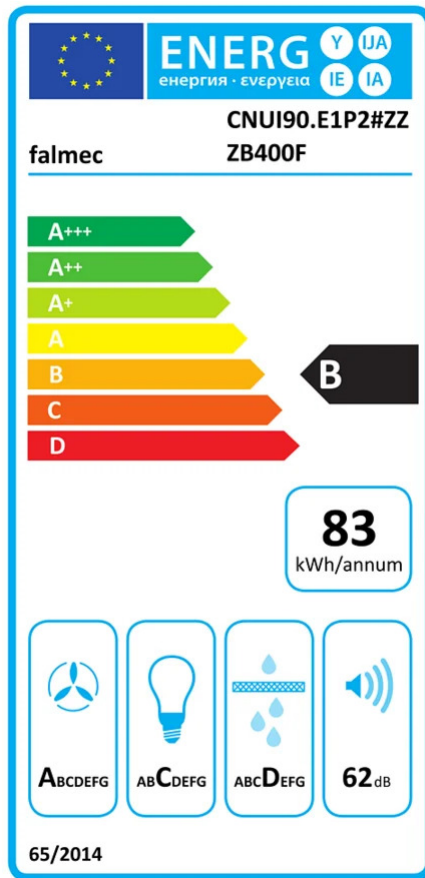

PF		
S	Falmec Lab	
M	Motor de acoperis 950 m3/h	
AEC	82.90	kWh/a
EEC	B	
FDE	28.10	
FDEC	A	
LE	17.50	
LEC	C	
GFE	65.1	
GFEC	D	
Qmin	365	m ³ /h
Qmax	600	m ³ /h
Qboost	695	m ³ /h
SPEmin	48	dBa
SPEmax	62	dBa
SPEboost	66	dBa
PO		
PS	0.48	W

PI		
F	1.00	
EEL	68.60	
Qbep	384	m ³ /h
Pbep	414	Pa
Qboost	695	m ³ /h
Wbep	157	W
WL	35.00	W
Emiddle	613	lux
Lwa-SPEmax	62	dBa

MOTOR SUBȚIRE 800 M3/H

PF		
S		
M	Motor subțire 800 m3/h	
AEC	70.9	kWh/a
EEC	C	
FDE	24.2	
FDEC	B	
LE	17.5	
LEC	C	
GFE	65.1	
GFEC	D	
Qmin	245	m ³ /h
Qmax	470	m ³ /h
Qboost	540	m ³ /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W

PI		
F		
EEI	73.3	
Qbep	332	m ³ /h
Pbep	297	Pa
Qboost	540	m ³ /h
Wbep	113	W
WL	35	W
Emiddle	613	lux
Lwa-SPEmax		dBa

REMOTE UNDER-ROOF 1100 M3/H BRUSHLESS

PF		
S	Remote under-roof 1100 m3/h Brushless	
M	Remote under-roof 1100 m3/h Brushless	
AEC	17.9	kWh/a
EEC	A+++	
FDE	42	
FDEC	A	
LE	17.5	
LEC	C	
GFE	65.1	
GFEC	D	
Qmin	330	m ³ /h
Qmax	716	m ³ /h
Qboost	680	m ³ /h
SPEmin	53	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	0	W
PS	0.48	W
PI		
F	1	
EEL	25.2	
Qbep	399	m ³ /h
Pbep	368	Pa
Qboost	680	m ³ /h
Wbep	97	W
WL	0	W
Emiddle	0	lux
Lwa-SPEmax		dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.