



<b>Versiune</b>	Perete 120 cm - Inox - 800 m <sup>3</sup> /h
<b>Design</b>	Falmecc Lab Silence - NRS
<b>Technology</b>	Scotch brite stainless steel (AISI 304) Sticlă călită cu finisaj din oțel Tehnologie NRS pentru liniște în bucătărie
<b>Control</b>	Panou cu buton tactil
<b>Modul</b>	
<b>Iluminat</b>	Dynamic LED Light (2700K - 5600K) Dimmable led lighting
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerable Carbon.Zeo Microtech (opțional)
<b>Dimensions</b>	120 cm 52 cm 65 cm
<b>Notes</b>	Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024
<b>Tensiune/frecvență</b>	320 W 220-240V 50-60Hz
<b>Plug</b>	Shuko
<b>Motor</b>	800 m <sup>3</sup> /h 610 m <sup>3</sup> /h I.E.C.61591 46 dB (A)re1pW I.E.C. 60704-2-13 B
<b>Net Weight</b>	48 kg 41 kg 0.65 m <sup>3</sup> L 1330 x H 677 x P 725 mm

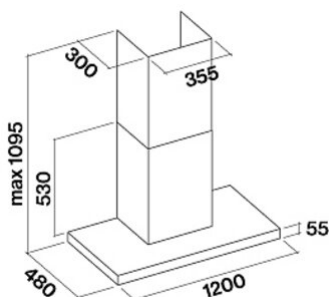


**Accessorii optionale**

<b>Code</b>	<b>Description</b>
KACL.1039	Filtru Regenerabil Carbon.Zeo Microtech
KACL.570#I	Extension H700 Wall - Inox
KACL.571#I	Extension H960 Wall - Inox
KACL.400	Tubulatura NRS
KACL.815	Șervețel de protecție pentru suprafețe din oțel inoxidabil (cutie 10 buc.)

Viteza motorului	1	2	3	4
	37	41	46	54,5
	220	290	375	610
	390	440	490	510
	130	150	178	224
leșire aer	150	150	150	150

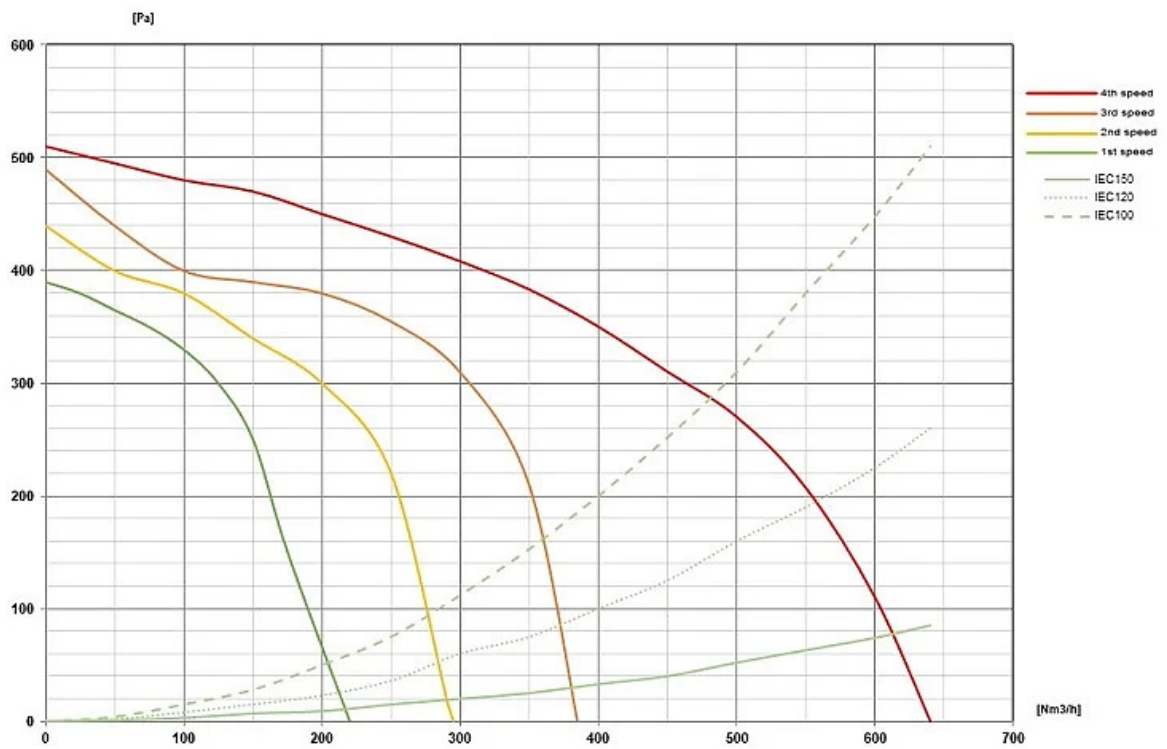

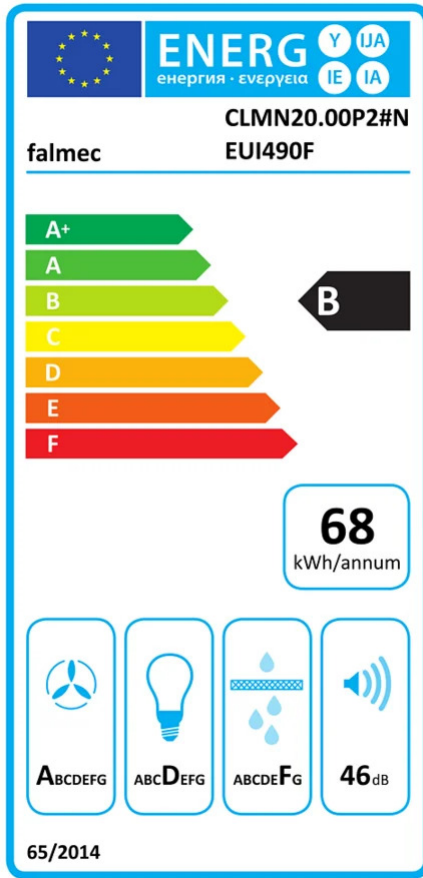

PF		
S	Falmec Lab	
M	Perete 120 cm - Inox - 800 m3/h	
AEC	68.30	kWh/a
EEC	B	
FDE	28.90	
FDEC	A	
LE	12.60	
LEC	D	
GFE	53	
GFEC	F	
Qmin	220	m <sup>3</sup> /h
Qmax	375	m <sup>3</sup> /h
Qboost	610	m <sup>3</sup> /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	54	dBa
PO	0	W
PS	0.48	W

PI		
F	1.00	
EEL	66.40	
Qbep	369	m <sup>3</sup> /h
Pbep	369	Pa
Qboost	610	m <sup>3</sup> /h
Wbep	131	W
WL	28.00	W
Emiddle	353	lux
Lwa-SPEmax	46	dBa

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.