

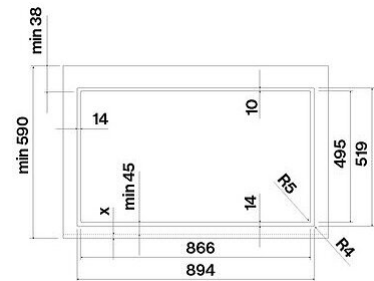



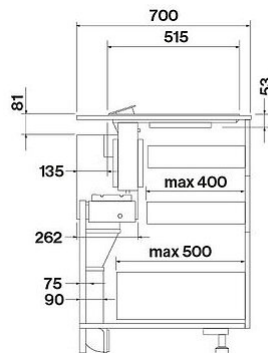
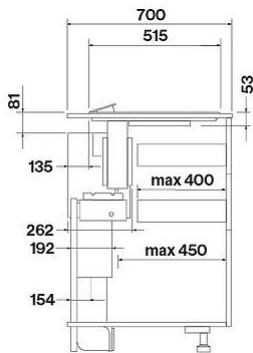
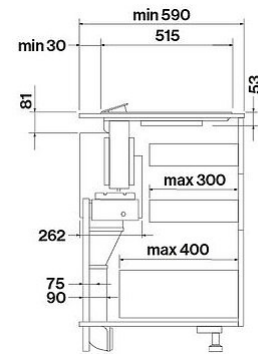


Versiune	Blat de lucru - 90 cm - 800 m ³ /h
Design	Falmecc Lab Sisteme integrate de gătit Sticlă ceramică neagră Cronometru / cronometru Automode (reglarea aspirației în funcție de gătit) Sistem de clapetă motorizat Tehnologia Flex Surface
Control	Glisor tactil 9 niveluri de gătit + boost
Modul	
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerable Carbon.Zeo Microtech (opțional)
Power	Power level management from 2.8kW to 7.4kW
Motor	Motor fără perii
Dimensions	90 cm
Cooking Functions	Indicator de căldură reziduală Funcția de rechemare Funcția Keep Warm (44°) Detectarea automată a vasului Oprire automată cu temporizator (pentru fiecare zonă de gătit) Blocare control / siguranță pentru copii Funcția de pauză Funcția de punte dublă Chef function: setting 4 different power levels in the 4 cooking zones
Notes	
Tensiune/frecvență	7560 W 220-240V 50-60Hz
Motor	Motor fără perii 800 m ³ /h 690 m ³ /h I.E.C.61591 65 dB (A)re1pW I.E.C. 60704-2-13 A+++
Net Weight	35.5 kg 30.3 kg 0.29 m ³ L 980 x H 482 x P 615 mm







Accessorii optionale

Code	Description
KACL.1026	Silence Kit
KACL.1054	Filtru Regenerabil Carbon.Zeo Microtech (2x)

<i>Viteza motorului</i>	1	5	9	10
	44	57	65	66
	254	460	640	690
	200	650	670	680
	11	50	110	150
<i>leşire aer</i>	150	150	150	150

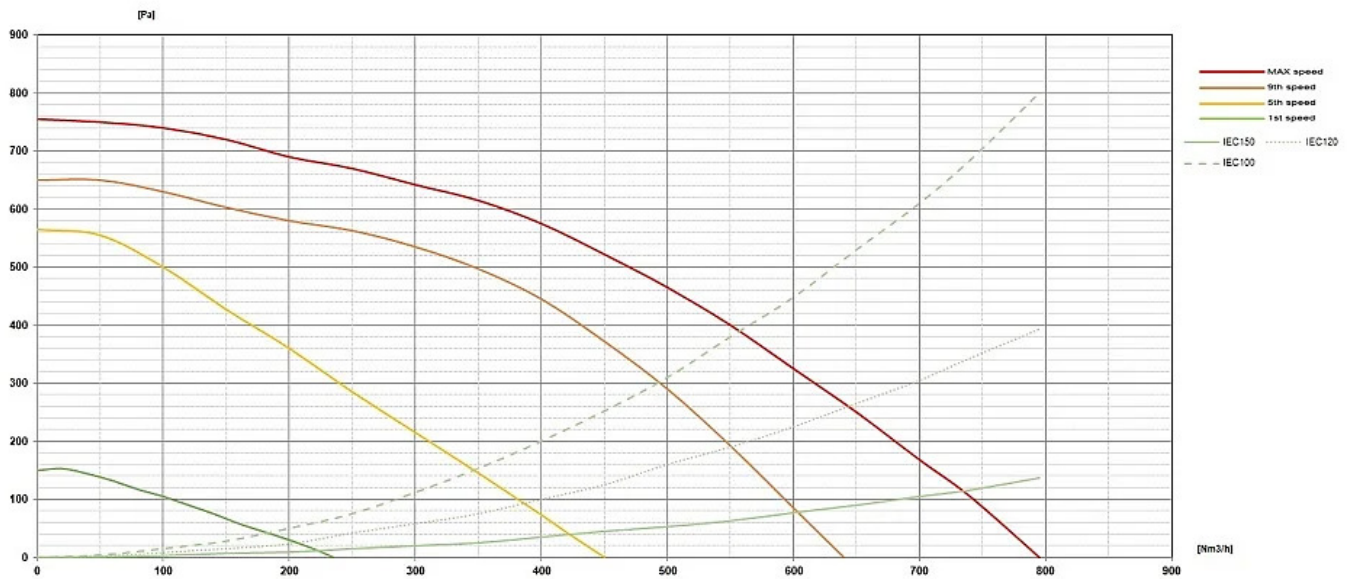

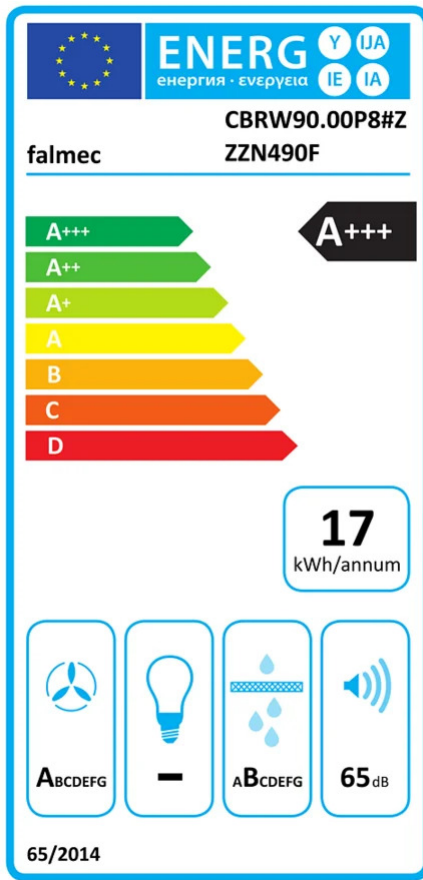

PF		
S	Falmecc Lab	
M	Blat de lucru - 90 cm - 800 m ³ /h	
AEC	16.50	kWh/a
EEC	A+++	
FDE	43.40	
FDEC	A	
LE	0.00	
LEC		
GFE	87	
GFEC	B	
Qmin	254	m ³ /h
Qmax	640	m ³ /h
Qboost	690	m ³ /h
SPEmin	44	dBa
SPEmax	65	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W
PI		
F	0.40	
EEL	21.30	
Qbep	384	m ³ /h
Pbep	460	Pa
Qboost	690	m ³ /h
Wbep	113	W
WL	0.00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions (in dB) at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.