

Versiune

Design

Falmec Lab
Silence - NRS

Technology

Oțel inoxidabil, finisaj scotch brite
Tehnologie NRS pentru liniște în bucătărie
Rotatable tempered glass flap with integrated control
Protective flaps for the edge of the wall unit

Control

Panou cu buton tactil

Modul

Iluminat

Dynamic LED Light (2700K - 5600K)
Dimmable led lighting
Strip Led 5,8 W - 2700 K / 5600 K

Filters

Filtru de grăsime din metal, detașabil și lavabil
Filtru Regenerable Carbon.Zeo Microtech (opțional)

Dimensions

90 cm
52 cm
52 cm

Notes

280 W

Tensiune/frecvență



220-240V 50-60Hz

Motor

800 m³/h
636 m³/h I.E.C.61591
51 dB (A)re1pW I.E.C. 60704-2-13
A


Net Weight

27 kg
21 kg
0.31 m³
L 1035 x H 412 x P 740 mm



Accessorii optionale

Code	Description
KACL.400	Tubulatura NRS
KCVJN.19#I	Chimney kit Virgola Touch NRS H 315 + extension H 295
KACL.1039	Filtru Regenerabil Carbon.Zeo Microtech

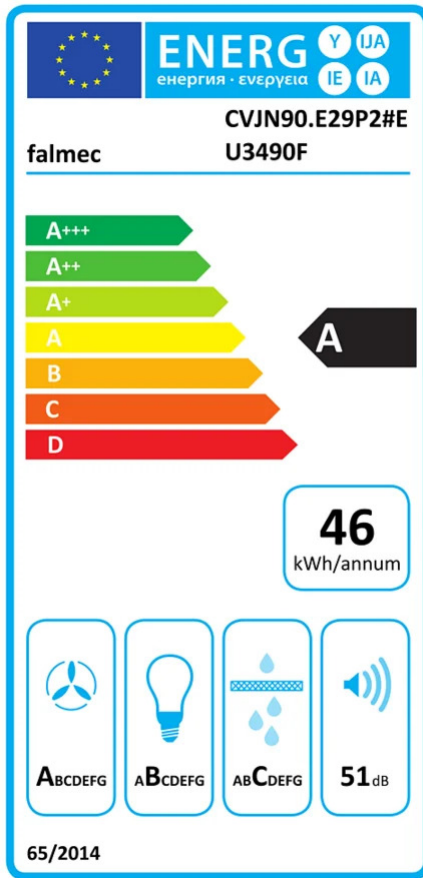

PF		
S	Falmecc Lab	
M		
AEC	46.00	kWh/a
EEC	A	
FDE	31.70	
FDEC	A	
LE	21.20	
LEC	B	
GFE	84	
GFEC	C	
Qmin	299	m ³ /h
Qmax	521	m ³ /h
Qboost	636	m ³ /h
SPEmin	39	dBa
SPEmax	51	dBa
SPEboost	58	dBa
PO		
PS	0.28	W
PI		
F	0.90	
EEL	52.10	
Qbep	382	m ³ /h
Pbep	379	Pa
Qboost	636	m ³ /h
Wbep	127	W
WL	5.80	W
Emiddle	123	lux
Lwa-SPEmax	51	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.