










<b>Versiune</b>	Zero Easy - 84 cm - 600 m <sup>3</sup> /h
<b>Design</b>	Falmecc Lab Sisteme integrate de gătit  Sticlă ceramică neagră Cronometru / cronometru Automode (reglarea aspirației în funcție de gătit) Tehnologia Flex Surface
<b>Control</b>	Colector de lichid vidabil Glisor tactil 9 niveluri de gătit + boost
<b>Modul</b>	Filtering
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerabil Carbon.Zeo Microtech
<b>Power</b>	Power level management from 2.8kW to 7.4kW
<b>Motor</b>	Motor fără perii
<b>Dimensions</b>	84 cm
<b>Cooking Functions</b>	Indicator de căldură reziduală Funcția de rechemare Funcția Keep Warm (44°) Detectarea automată a vasului Oprire automată cu temporizator (pentru fiecare zonă de gătit) Blocare control / siguranță pentru copii Funcția de pauză Funcția de punte
<b>Tensiune/frecvență</b>	7560 W 220-240V 50-60Hz
<b>Motor</b>	Motor fără perii 600 m <sup>3</sup> /h 515 m <sup>3</sup> /h I.E.C.61591 69 dB (A)re1pW I.E.C. 60704-2-13 A+
<b>Net Weight</b>	34 kg 27.9 kg 0.24 m <sup>3</sup> L 1055 x H 377 x P 610 mm





### Accesorii optionale

Code	Description
KACL.1043	Filtru Regenerabil Carbon.Zeo Microtech (1x)
KACL.1036	Deflector de zgomot
KACL.155#NF	Cadru negru - 84 cm

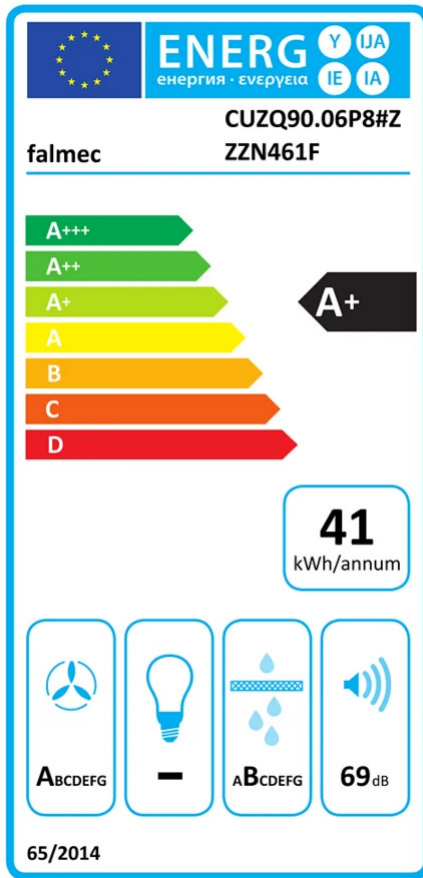

PF		
S	Falmecc Lab	
M	Zero Easy - 84 cm - 600 m3/h	
AEC	41.40	kWh/a
EEC	A+	
FDE	34.80	
FDEC	A	
LE	0.00	
LEC		
GFE	87	
GFEC	B	
Qmin	380	m <sup>3</sup> /h
Qmax	495	m <sup>3</sup> /h
Qboost	515	m <sup>3</sup> /h
SPEmin	62	dBa
SPEmax	69	dBa
SPEboost	70	dBa
PO		
PS	0.48	W
PI		
F	0.80	
EEL	39.70	
Qbep	305	m <sup>3</sup> /h
Pbep	665	Pa
Qboost	515	m <sup>3</sup> /h
Wbep	162	W

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Eemiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.