






Versiune	Albă - 85 cm - 800 m ³ /h
Design	Falmec Lab Design
	Versiune cu panou personalizabil Deschidere față Zonă de aspirație dublă (față și jos)
Control	Telecomandă (opțional) Dialogue system cu mod automat Panou cu buton tactil
Modul	
Masca pentru tubulatura	Ieșire din spate posibilă Șemineu opțional
Iluminat	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 2x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru combinat Carbon.Zeo, regenerabil (opțional) Filtru de carbon (opțional)
Dimensions	85 cm 52 cm 52 cm
Notes	From 02.09.2024 the Dialogue System control and dimmable light are included while the carbon filter 103050091 is optional.
Tensiune/frecvență	280 W 220-240V ~ 50-60Hz
Motor	800 m ³ /h 708 m ³ /h I.E.C.61591 65 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	23.8 kg 18.7 kg 0.27 m ³ L 995 x H 450 x P 595 mm





Accessorii optionale

Code	Description
103050091	Filtru de carbon rotund Ø170 mm - Tip 6
KACL.941	External Carbon.Zeo filter unit for sloped hoods
KCQAN.00#B	Optional Chimney (White)
105080053	Telecomanda
KACL.1059	Deflector de aer pentru ieşire D=150mm

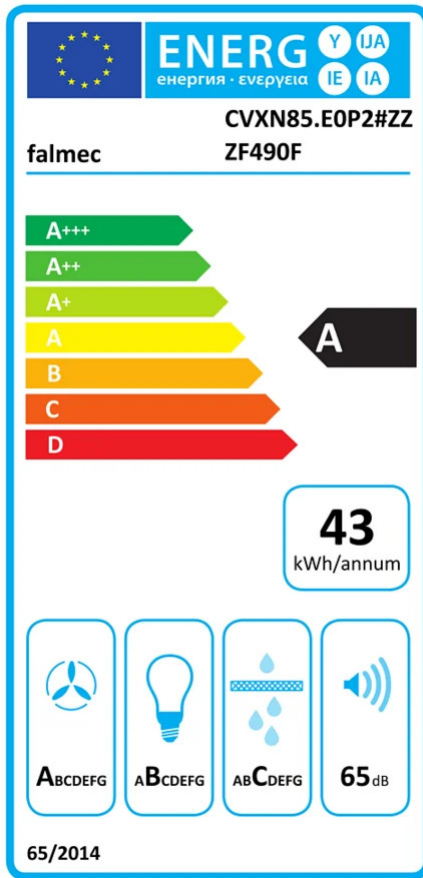

PF		
S	Falmec Lab	
M	Albă - 85 cm - 800 m3/h	
AEC	43.00	kWh/a
EEC	A	
FDE	33.30	
FDEC	A	
LE	21.60	
LEC	B	
GFE	82	
GFEC	C	
Qmin	299	m ³ /h
Qmax	584	m ³ /h
Qboost	708	m ³ /h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	0	W
PS	0.48	W
PI		
F	0.80	
EEL	46.80	
Qbep	429	m ³ /h
Pbep	375	Pa
Qboost	708	m ³ /h
Wbep	134	W
WL	5.30	W
Emiddle	114	lux
Lwa-SPEmax		dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.