

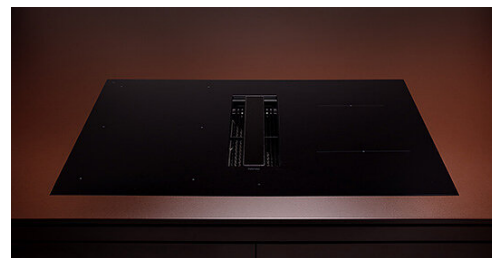




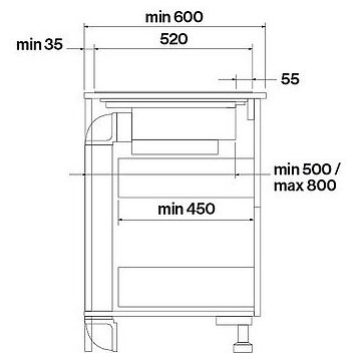


<b>Versiune</b>	Zero - 84 cm - 600 m <sup>3</sup> /h
<b>Design</b>	Falmecc Lab Sisteme integrate de gătit  Sticlă ceramică neagră Cronometru / cronometru Automode (reglarea aspirației în funcție de gătit) Tehnologia Flex Surface
<b>Control</b>	Colector de lichid vidabil Glisor tactil 9 niveluri de gătit + boost
<b>Modul</b>	
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru combinat Carbon.Zeo, regenerabil (opțional)
<b>Power</b>	Power level management from 2.8kW to 7.4kW
<b>Motor</b>	Motor fără perii
<b>Dimensions</b>	84 cm
<b>Cooking Functions</b>	Indicator de căldură reziduală Funcția de rechemare Funcția Keep Warm (44°) Detectarea automată a vasului Oprire automată cu temporizator (pentru fiecare zonă de gătit) Blocare control / siguranță pentru copii Funcția de pauză Funcția de punte
<b>Tensiune/frecvență</b>	7560 W 220-240V 50-60Hz
<b>Motor</b>	Motor fără perii 600 m <sup>3</sup> /h 515 m <sup>3</sup> /h I.E.C.61591 69 dB (A)re1pW I.E.C. 60704-2-13 A+
<b>Net Weight</b>	34 kg 27.9 kg 0.24 m <sup>3</sup> L 1055 x H 377 x P 610 mm




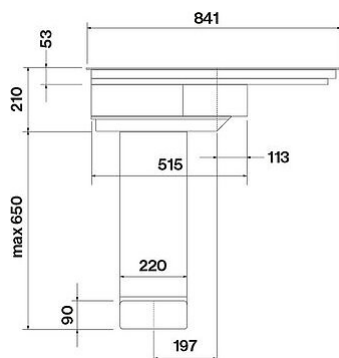

## Accesorii optionale

Code	Description
KACL.930	Filtru Carbon.Zeo subbază h100 mm
KACL.931	Filter replacement Carbon.Zeo for vertical outlet and under base kit h100 mm
KACL.951	Underbase Slim filter unit (h60mm)
KACL.952	Filter replacement (underbase Slim filter unit - h60mm)
KACL.955	Base grid (underbase Slim filter unit - h60mm)
KACL.155#NF	Cadru negru - 84 cm

<b>Viteza motorului</b>	1	5	9	10
	62	68	69	70
	380	460	495	515
	200	550	780	810
	11	32	74	131
<b>leșire aer</b>	220x90	220x90	220x90	220x90

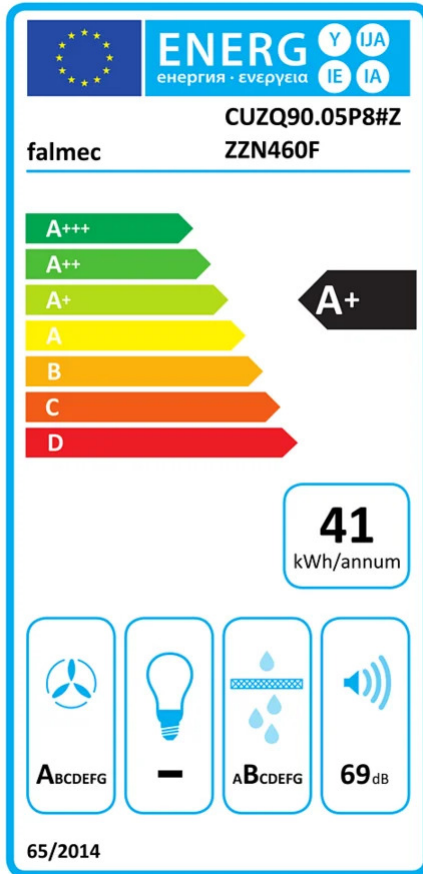

PF		
S	Falmec Lab	
M	Zero - 84 cm - 600 m3/h	
AEC	41.40	kWh/a
EEC	A+	
FDE	34.80	
FDEC	A	
LE	0.00	
LEC		
GFE	87	
GFEC	B	
Qmin	380	m <sup>3</sup> /h
Qmax	495	m <sup>3</sup> /h
Qboost	515	m <sup>3</sup> /h
SPEmin	62	dBa
SPEmax	69	dBa
SPEboost	70	dBa
PO		
PS	0.48	W
PI		
F	0.80	
EEL	39.70	
Qbep	305	m <sup>3</sup> /h
Pbep	665	Pa
Qboost	515	m <sup>3</sup> /h
Wbep	162	W

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.