



Versiune	Perete 90 cm - Antracit - 600 m ³ /h
Design	Falmec Lab Design Oțel vopsit antracit Marginea frontală cizelată
Control	Slider
Modul	
Iluminat	Led 2x2 W (2700 K)
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon
Dimensions	90 cm 52 cm 65 cm
	230 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	600 m ³ /h 480 m ³ /h I.E.C.61591 58 dB (A)re1pW I.E.C. 60704-2-13 C
Net Weight	22 kg 18 kg 0.37 m ³ L 995 x H 632 x P 595 mm



Viteza motorului	1	2	3
	49	58	65
	220	320	480
	270	400	500
	100	130	180
leșire aer	120	120	120

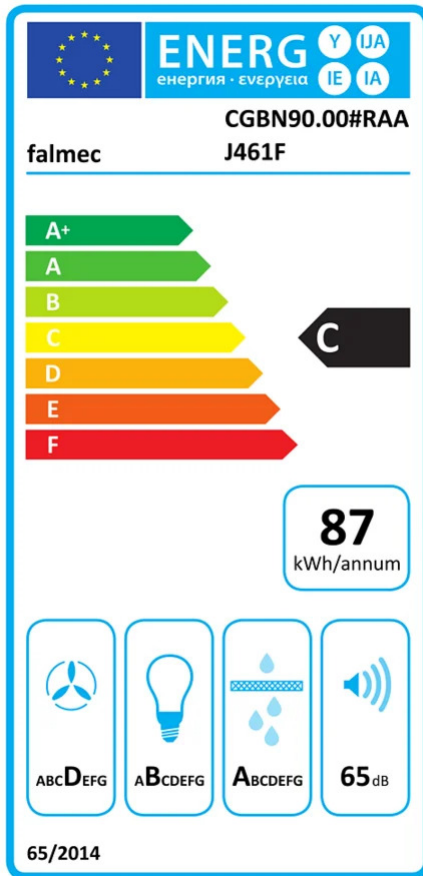

PF		
S	Falmec Lab	
M	Perete 90 cm - Antracit - 600 m3/h	
AEC	87.10	kWh/a
EEC	C	
FDE	15.80	
FDEC	D	
LE	25.50	
LEC	B	
GFE	96	
GFEC	A	
Qmin	220	m ³ /h
Qmax	480	m ³ /h
Qboost	480	m ³ /h
SPEmin	49	dBa
SPEmax	58	dBa
SPEboost	0	dBa
PO	0	W
PS	0.00	W
PI		
F	1.40	
EEl	80.60	
Qbep	303	m ³ /h
Pbep	308	Pa
Qboost	480	m ³ /h
Wbep	164	W
WL	4.50	W
Emiddle	121	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.