



Versiune	Evolution - Incorporat 120 cm - Inox - 600 m ³ /h
Design	Falmec Lab Design
	Oțel inoxidabil, finisaj scotch brite Rotatable tempered glass flap Protective flaps for the edge of the wall unit
Control	Panou de control electronic
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 4x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon (opțional)
Dimensions	120 cm 52 cm 52 cm
Notes	Dimmable led lighting since 04.17.23
	230 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	600 m ³ /h 580 m ³ /h I.E.C.61591 65 dB (A)re1pW I.E.C. 60704-2-13 B
	16.5 kg
Net Weight	12.7 kg 0.25 m ³ L 1295 x H 412 x P 465 mm

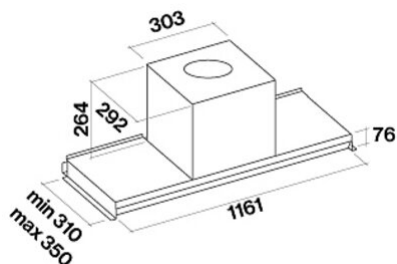


Accessorii optionale

Code	Description
KACL.960	Filtru de carbon
KACL.108	Sticla raft 120 cm
KCVJN.01#3	Kit Chimney Virgola-Move H120 Stainless Steel
KCVJN.00#3	Telescopic chimney h 185 + h 185 - Virgola/Move
KACL.1059	Deflector de aer pentru ieşire D=150mm

Viteza motorului	1	2	3
	47	56	65
	240	350	580
	250	400	480
	130	160	200
leșire aer	150	150	150

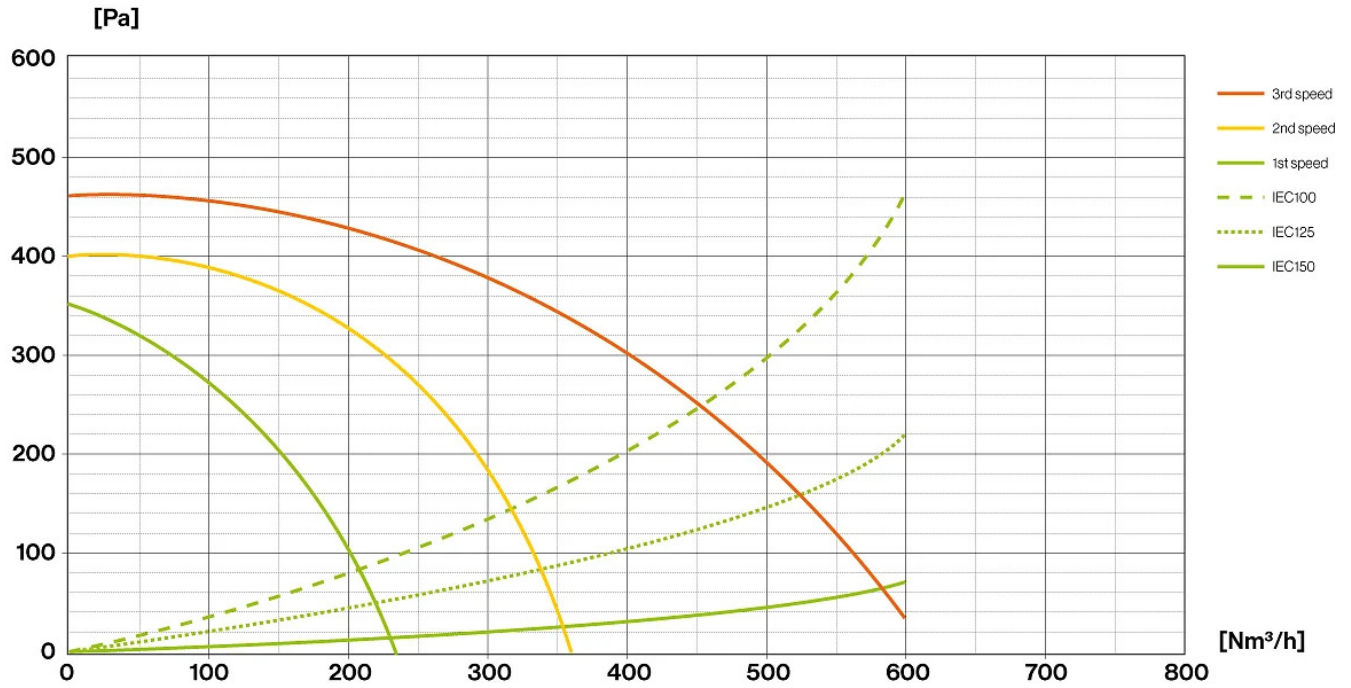

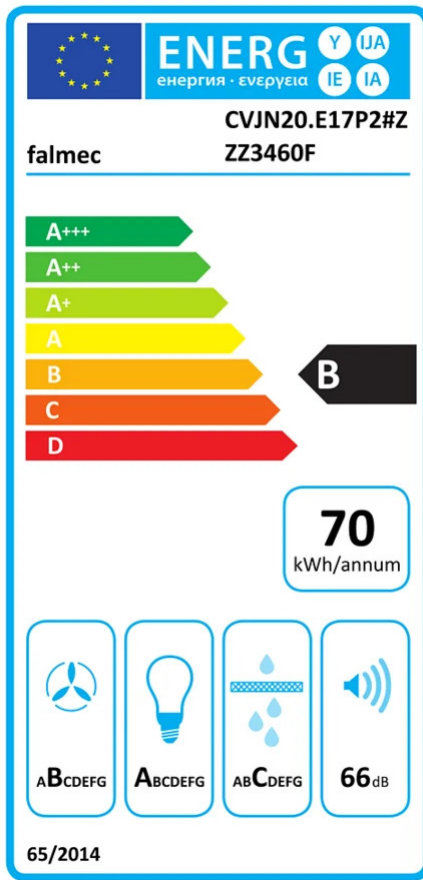

PF		
S	Falmec Lab	
M	Evolution - Incorporat 120 cm - Inox - 600 m3/h	
AEC	69.80	kWh/a
EEC	B	
FDE	23.20	
FDEC	B	
LE	31.40	
LEC	A	
GFE	80	
GFEC	C	
Qmin	240	m ³ /h
Qmax	580	m ³ /h
Qboost	580	m ³ /h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost		
PO		
PS	0.48	W

PI		
F	1.20	
EEL	69.90	
Qbep	360	m ³ /h
Pbep	337	Pa
Qboost	580	m ³ /h
Wbep	145	W
WL	8.60	W
Emiddle	270	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.