




<b>Versiune</b>	Plus - Perete - 40 cm - Inox - 800 m <sup>3</sup> /h
<b>Design</b>	Falmecc Lab Design  Oțel inoxidabil, finisaj scotch brite Aspirație perimetrală
<b>Control</b>	Panou de control electronic
<b>Modul</b>	
<b>Iluminat</b>	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Strip LED - 2700 K / 5600 K
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon (opțional)
<b>Dimensions</b>	40 cm 52 cm 60 cm
<b>Notes</b>	
<b>Tensiune/frecvență</b>	280 W 220-240V ~ 50-60Hz
<b>Motor</b>	800 m <sup>3</sup> /h 570 m <sup>3</sup> /h I.E.C. 61591 61 dB (A)re1pW I.E.C. 60704-2-13 B
<b>Net Weight</b>	20 kg 16 kg 0.28 m <sup>3</sup> L 995 x H 480 x P 595 mm

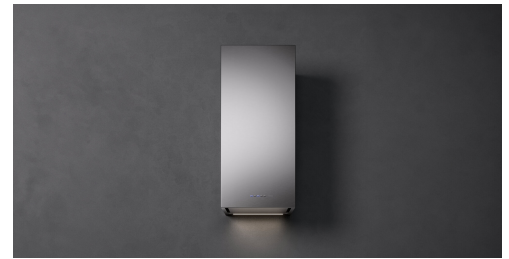


## **Accessorii optionale**

<i>Code</i>	<i>Description</i>
103050091	Filtru de carbon rotund Ø170 mm - Tip 6

Viteza motorului	1	2	3	4
	50	54	61	64
	264	365	476	570
	415	450	470	490
	130	150	178	224
leșire aer	150	150	150	150

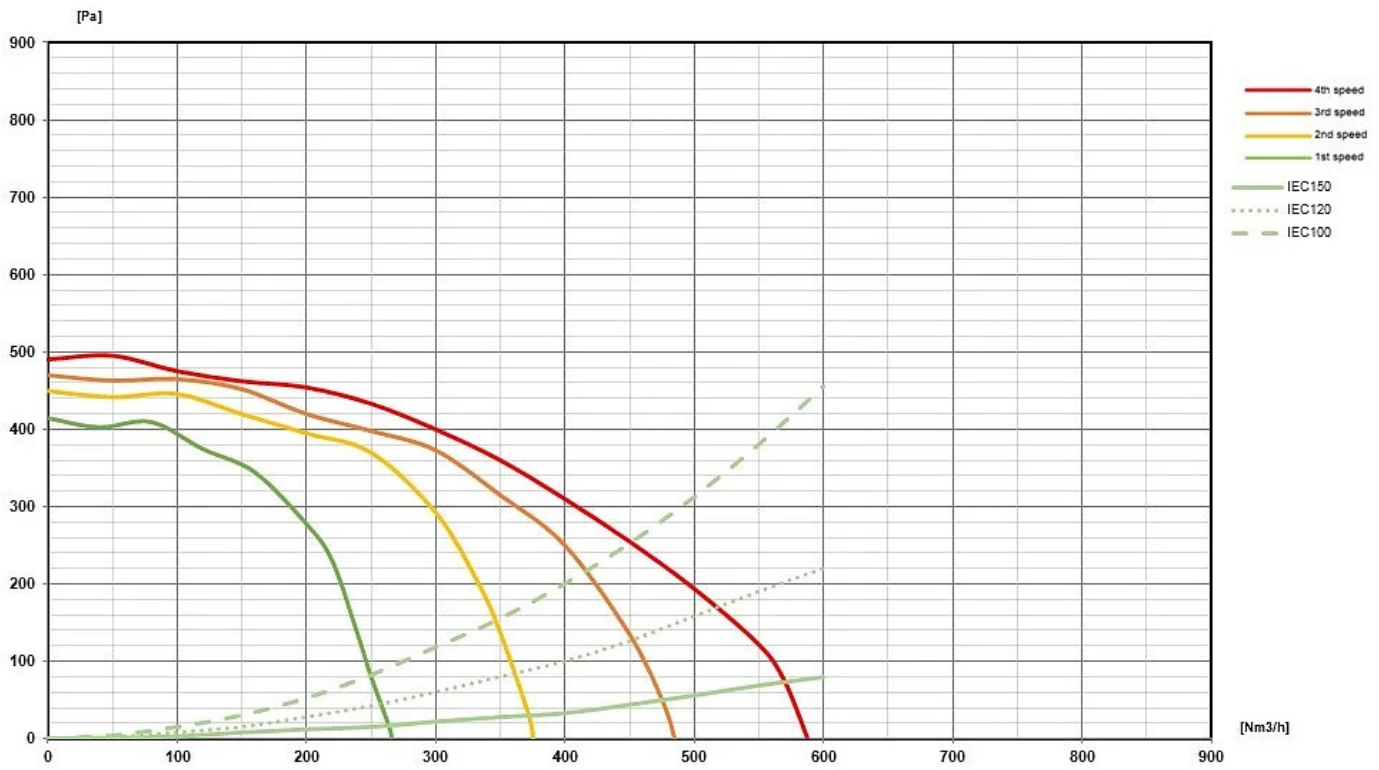

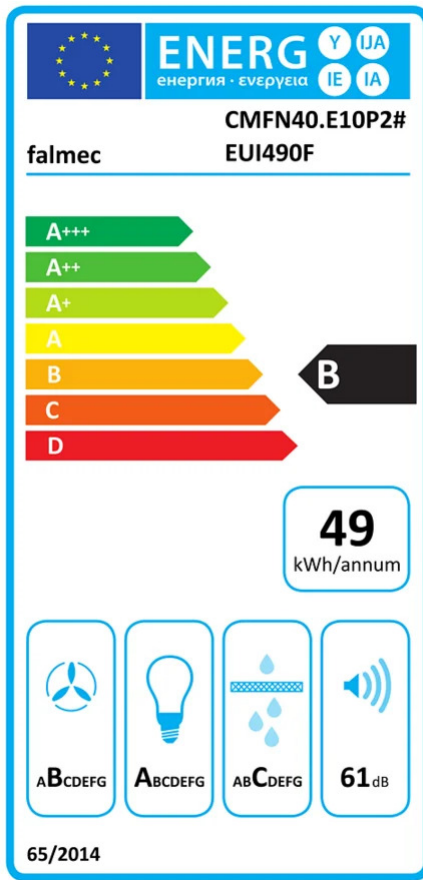

PF		
S	Falmecc Lab	
M	Plus - Perete - 40 cm - Inox - 800 m3/h	
AEC	48.50	kWh/a
EEC	B	
FDE	27.00	
FDEC	B	
LE	29.70	
LEC	A	
GFE	80	
GFEC	C	
Qmin	264	m <sup>3</sup> /h
Qmax	476	m <sup>3</sup> /h
Qboost	570	m <sup>3</sup> /h
SPEmin	50	dBa
SPEmax	61	dBa
SPEboost	64	dBa
PO	0	W
PS	0.48	W
PI		
F	1.00	
EEL	56.10	
Qbep	324	m <sup>3</sup> /h
Pbep	378	Pa
Qboost	570	m <sup>3</sup> /h
Wbep	126	W
WL	3.50	W
Emiddle	104	lux
Lwa-SPEmax		dBa

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.