




Versiune	Perete 90 cm - Alb- 800 m3/h
Design	Falmecc Lab Design Scotch brite stainless steel (AISI 304) Finisaj din sticlă călită albă Aspirație perimetrală
Control	Panou cu buton tactil
Modul	
Masca pentru tubulatura	Ieșire din spate posibilă Șemineu opțional
Iluminat	Dynamic LED Light (2700K - 5600K) Led 3x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru combinat Carbon.Zeo, regenerabil (opțional) Filtru de carbon
Dimensions	90 cm 52 cm 57 cm
Notes	
	280 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	800 m ³ /h 750 m ³ /h I.E.C.61591 58 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	39 kg 33 kg 0.42 m ³ L 1035 x H 562 x P 740 mm




Accessorii optionale

Code	Description
KACL.941	External Carbon.Zeo filter unit for sloped hoods
KCQAN.00#I	Şemineu - Inox
KCQAN.00#B	Optional Chimney (White)
KACL.1059	Deflector de aer pentru ieşire D=150mm
KACL.815	Şerveţel de protecţie pentru suprafeţe din oţel inoxidabil (cutie 10 buc.)

Viteza motorului	1	2	3	4
	46	53	58	66
	295	390	500	750
	390	440	490	510
	130	150	178	224
leșire aer	150	150	150	150

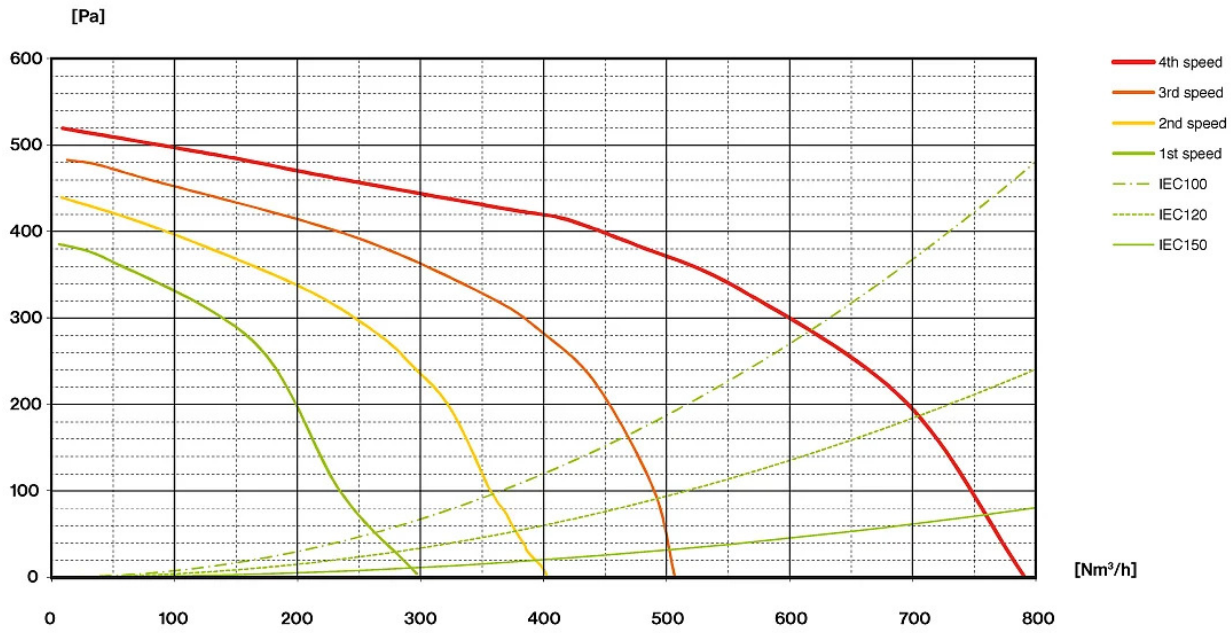

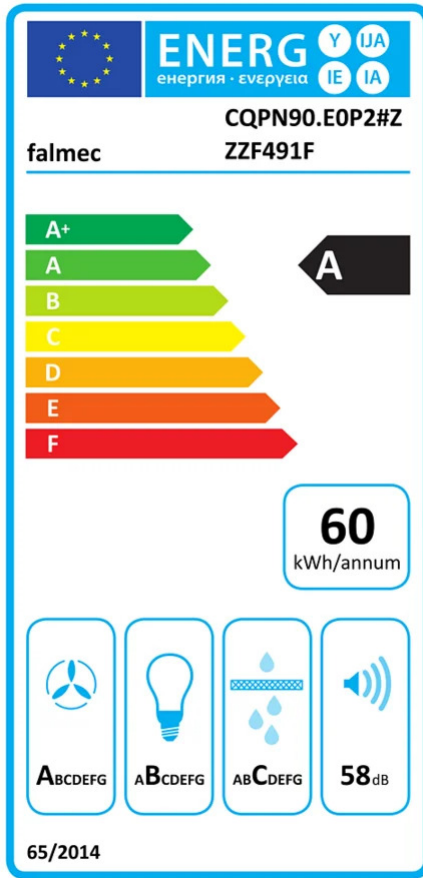

PF		
S	Falmec Lab	
M	Perete 90 cm - Alb- 800 m3/h	
AEC	59.50	kWh/a
EEC	A	
FDE	29.40	
FDEC	A	
LE	20.70	
LEC	B	
GFE	76	
GFEC	C	
Qmin	295	m ³ /h
Qmax	500	m ³ /h
Qboost	750	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO		
PS	0.48	W
PI		
F	0.90	
EEL	54.20	
Qbep	430	m ³ /h
Pbep	404	Pa
Qboost	750	m ³ /h
Wbep	164	W
WL	6.50	W
Emiddle	134	lux
Lwa-SPEmax	58	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.