



Versiune	Plus No-Drop - Incorpat - 90 cm - Inox - 800 m ³ /h
Design	Falmec Lab No-Drop
Technology	Scotch brite stainless steel (AISI 304) Sistem anti-condens patentat No-Drop Colector de lichid vidabil
Control	Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Strip LED 2x1,8 W - 2700 K / 5600 K
Filters	Filtru de carbon (opțional) Anti-condensation no-drop filter in technopolymer
Dimensions	90 cm 52 cm 62 cm
Tensiune/frecvență	280 W 220-240V 50-60Hz
Motor	800 m ³ /h 697 m ³ /h I.E.C.61591 64 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	15.4 kg 11.9 kg 0.15 m ³ L 915 x H 372 x P 455 mm



Accessorii optionale

<i>Code</i>	<i>Description</i>
103050091	Filtru de carbon rotund Ø170 mm - Tip 6
105080053	Telecomanda
KACL.1059	Deflector de aer pentru ieşire D=150mm

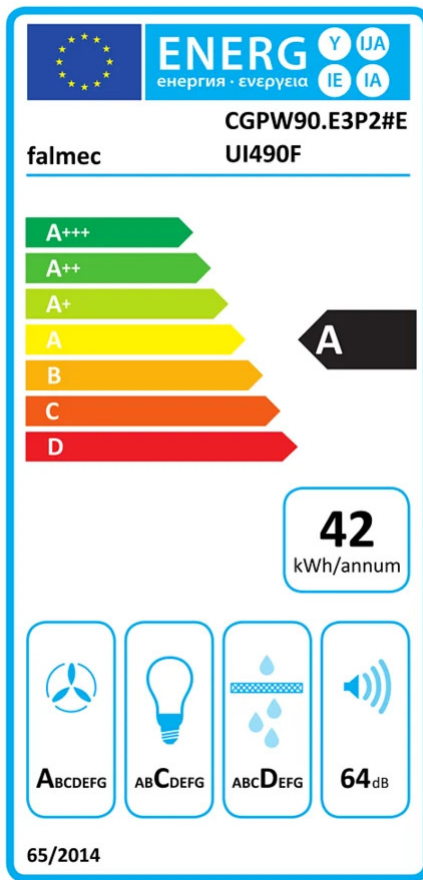

PF		
S	Falmecc Lab	
M	Plus No-Drop - Incorporat - 90 cm - Inox - 800 m3/h	
AEC	42.40	kWh/a
EEC	A	
FDE	32.80	
FDEC	A	
LE	18.00	
LEC	C	
GFE	70	
GFEC	D	
Qmin	304	m ³ /h
Qmax	575	m ³ /h
Qboost	697	m ³ /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO		
PS	0.28	W
PI		
F	0.80	
EEL	46.30	
Qbep	417	m ³ /h
Pbep	379	Pa
Qboost	697	m ³ /h
Wbep	134	W
WL	4.50	W
Emiddle	81	lux
Lwa-SPEmax	64	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.