



| | |
|---------------------------|---|
| Versiune | Perete 60 cm - 800 m ³ /h |
| Design | Falmec Lab Design |
| | Scotch brite stainless steel (AISI 304) |
| | Lumină ambientală LED |
| Control | Panou de control electronic Telecomandă (opțional) |
| Modul | |
| Iluminat | Strip led (4000K) |
| Filters | Filtru superior, detașabil și lavabil Filtru de carbon |
| Dimensions | 60 cm 52 cm 63 cm |
| Notes | |
| | 320 W |
| Tensiune/frecvență | 220-240V 50-60Hz |
| Plug | Shuko |
| Motor | 800 m ³ /h 680 m ³ /h I.E.C.61591 62 dB (A)re1pW I.E.C. 60704-2-13 B |
| | 20 kg |
| Net Weight | 17 kg 0.18 m ³ L 710 x H 432 x P 595 mm |




Accesorii optionale

| Code | Description |
|-------------|--|
| KACL.510#I | Extension H700 Wall - Inox |
| KACL.512#I | Extension H960 Wall - Inox |
| KACL.864 | Transportator pentru versiuni cu filtru (perete) |
| 105080053 | Telecomanda |
| KACL.815 | Șervețel de protecție pentru suprafețe din oțel inoxidabil (cutie 10 buc.) |

| Viteza motorului | 1 | 2 | 3 | 4 |
|------------------|-----|-----|-----|-----|
| | 49 | 56 | 62 | 68 |
| | 280 | 370 | 480 | 680 |
| | 390 | 420 | 480 | 500 |
| | 132 | 153 | 175 | 215 |
| leșire aer | 150 | 150 | 150 | 150 |

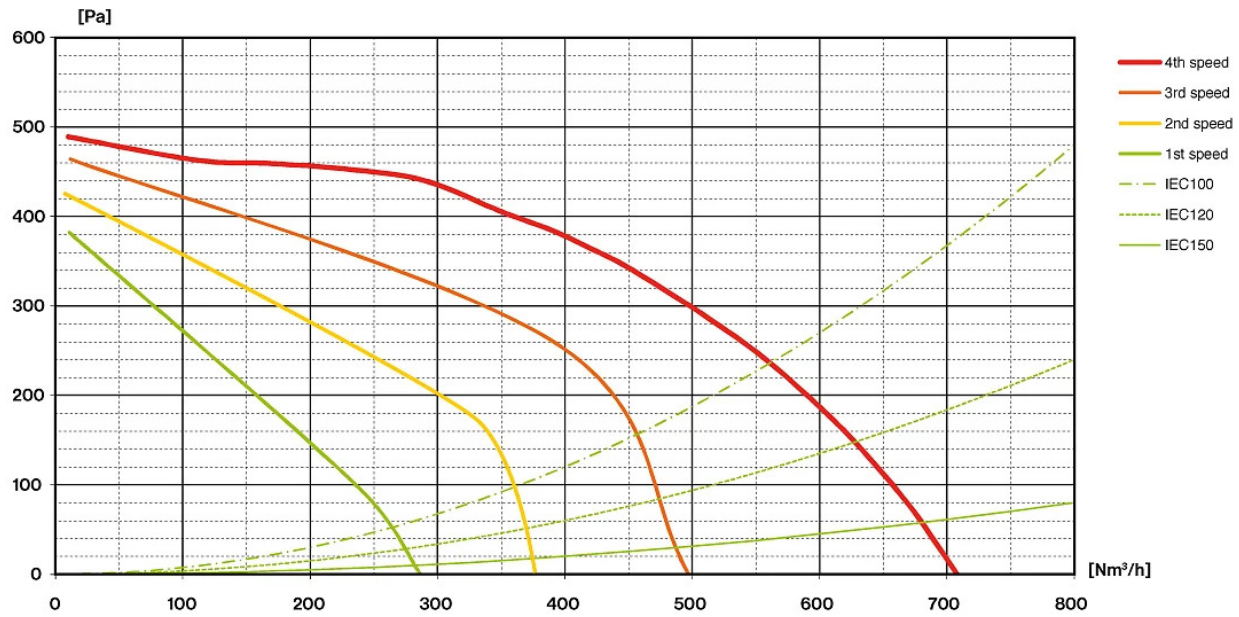

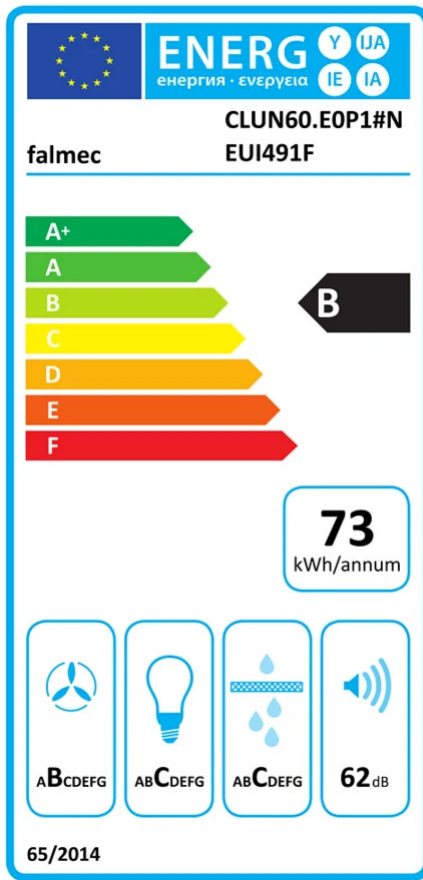

| PF | | |
|------------|-------------------------|-------------------|
| S | Falmecc Lab | |
| M | Perete 60 cm - 800 m3/h | |
| AEC | 72.80 | kWh/a |
| EEC | B | |
| FDE | 26.30 | |
| FDEC | B | |
| LE | 17.60 | |
| LEC | C | |
| GFE | 80 | |
| GFEC | C | |
| Qmin | 280 | m ³ /h |
| Qmax | 480 | m ³ /h |
| Qboost | 680 | m ³ /h |
| SPEmin | 49 | dBa |
| SPEmax | 62 | dBa |
| SPEboost | 68 | dBa |
| PO | 0 | W |
| PS | 0.48 | W |
| PI | | |
| F | 1.10 | |
| EEL | 67.10 | |
| Qbep | 382 | m ³ /h |
| Pbep | 384 | Pa |
| Qboost | 680 | m ³ /h |
| Wbep | 155.1 | W |
| WL | 14.40 | W |
| Emiddle | 253 | lux |
| Lwa-SPEmax | 62 | dBa |

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.