



Versiune	Insula - 175 cm - negru - 800 m ³ /h
Design	Falmec Lab Design Black matt Sticlă fumurie călită Aspirație perimetrală
Control	Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) LED Strip 4x10 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerable Carbon.Zeo Microtech (opțional)
Dimensions	175 cm 52 cm 63 cm
Notes	Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024
	280 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	800 m ³ /h 641 m ³ /h I.E.C.61591 62 dB (A)re1pW I.E.C. 60704-2-13 B
Net Weight	78.9 kg 67 kg 0.71 m ³ L 1905 x H 517 x P 725 mm

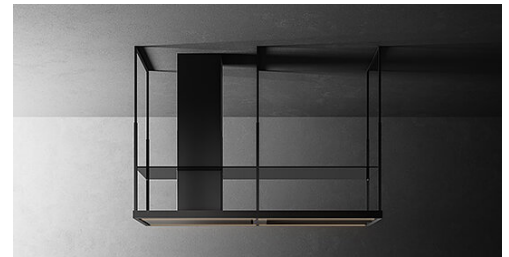


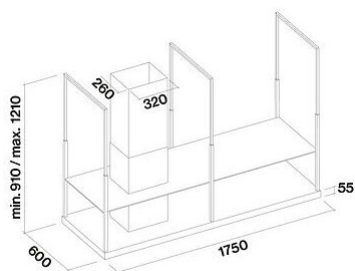


Accessorii optionale

Code	Description
KACL.1039	Filtru Regenerabil Carbon.Zeo Microtech
KACL.557#N	Extension H1200 Island - Black
KACL.1027#HF	Extension kit h125 cm
KACL.866	Transportoare pentru versiuni cu filtru (Island)
105080053	Telecomanda

Viteza motorului	1	2	3	4
	49	56	62	68
	280	370	480	680
	390	420	480	500
	132	153	175	215
leşire aer	150	150	150	150

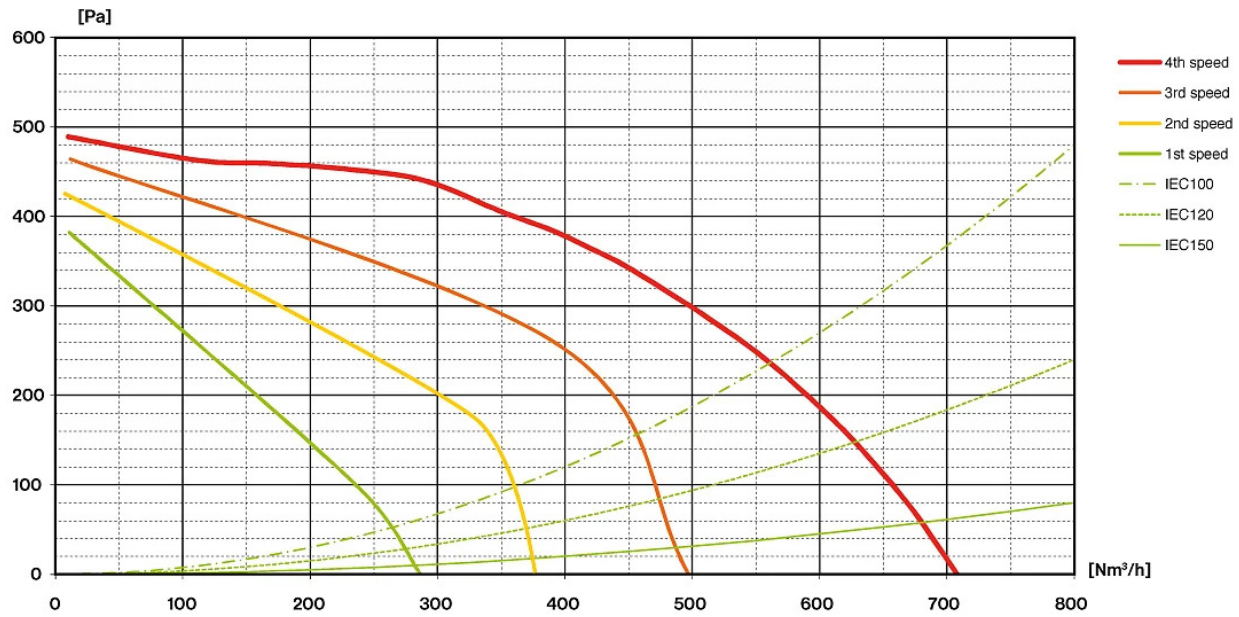

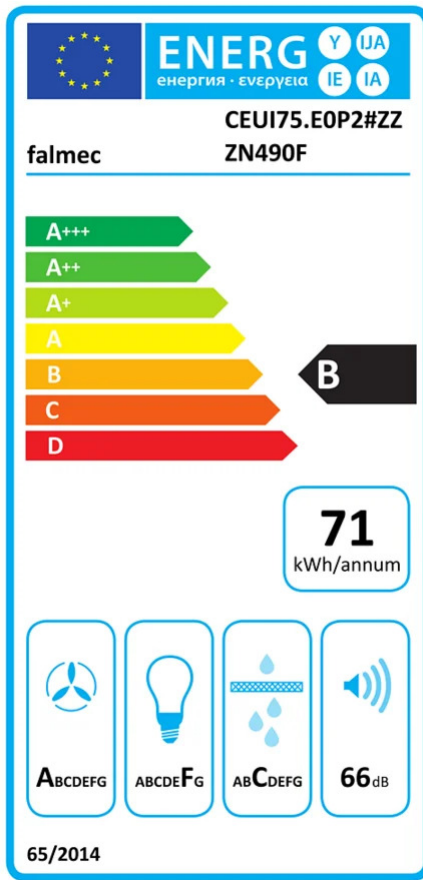

PF		
S	Falmecc Lab	
M	Insula - 175 cm - negro - 800 m3/h	
AEC	71.20	kWh/a
EEC	B	
FDE	29.20	
FDEC	A	
LE	7.30	
LEC	F	
GFE	80	
GFEC	C	
Qmin	313	m ³ /h
Qmax	573	m ³ /h
Qboost	641	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	69	dBa
PO		
PS	0.48	W
PI		
F	0.90	
EEL	65.70	
Qbep	366	m ³ /h
Pbep	373	Pa
Qboost	641	m ³ /h
Wbep	130	W
WL	39.00	W
Emiddle	285	lux
Lwa-SPEmax	66	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.