



Versiune	Plus - Incorpat - 50 cm - alb - 800 m ³ /h
Design	Falmec Lab Design Oțel vopsit alb Aspirație perimetrală
Control	Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 2x1,7 W - 2700 K / 5600 K
Filters	Filtru combinat Carbon.Zeo, regenerabil (opțional) Filtru de carbon (opțional)
Dimensions	50 cm 52 cm 62 cm
Tensiune/frecvență	280 W 220-240V 50-60Hz
Motor	800 m ³ /h 638 m ³ /h I.E.C.61591 63 dB (A)re1pW I.E.C. 60704-2-13 B
Net Weight	10 kg 7.6 kg 0.09 m ³ L 635 x H 382 x P 390 mm




Accessorii optionale

<i>Code</i>	<i>Description</i>
103050091	Filtru de carbon rotund Ø170 mm - Tip 6
105080053	Telecomanda
KACL.1059	Deflector de aer pentru ieşire D=150mm

Viteza motorului	1	2	3	4
	50	58	63	67
	280	420	548	638
	430	470	500	510
	145	175	215	245
leșire aer	150	150	150	150

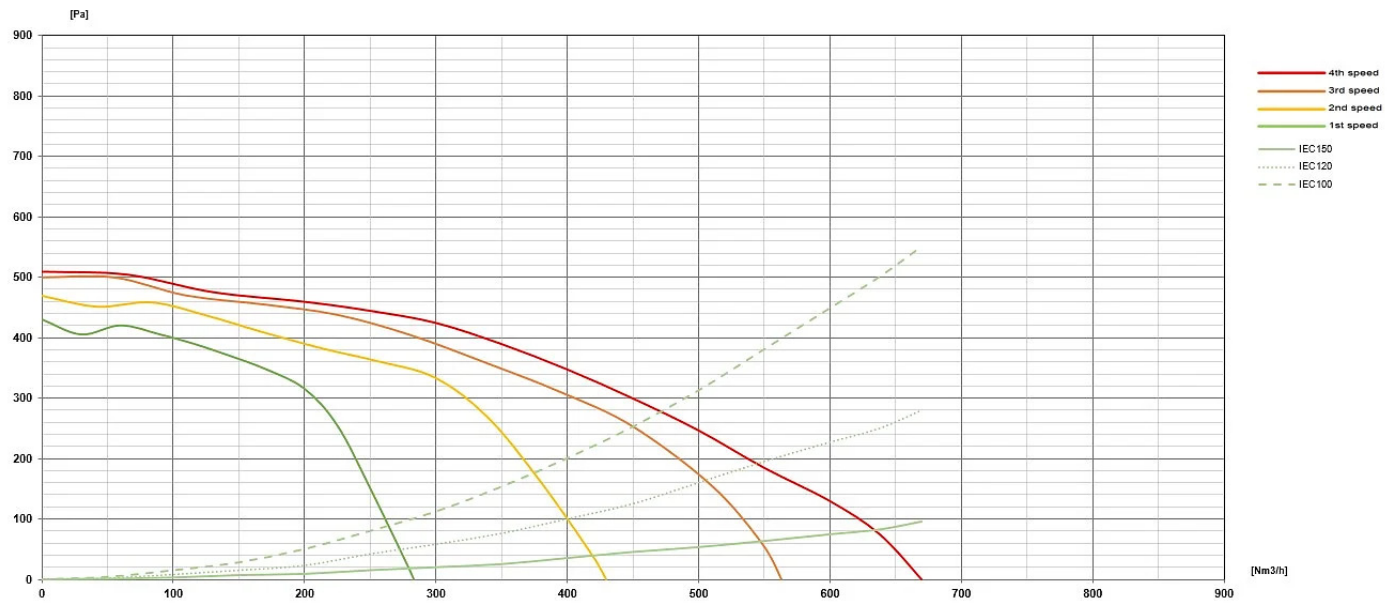

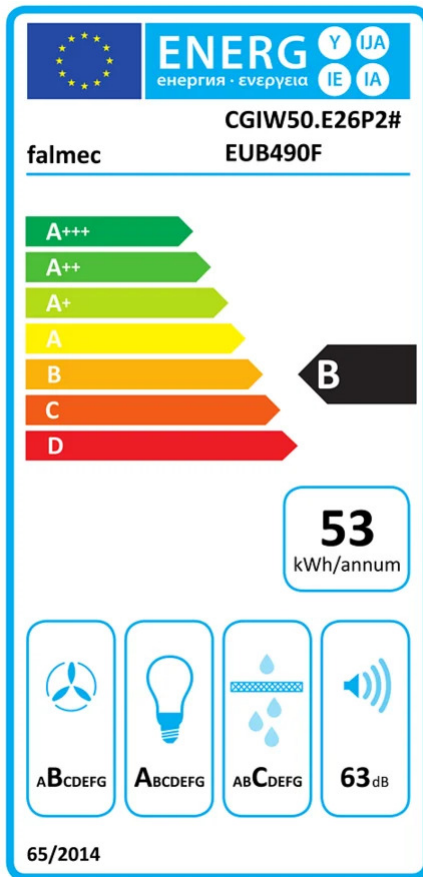

PF		
S	Falmec Lab	
M	Plus - Incorporat - 50 cm - alb - 800 m3/h	
AEC	53.30	kWh/a
EEC	B	
FDE	27.50	
FDEC	B	
LE	32.90	
LEC	A	
GFE	80	
GFEC	C	
Qmin	280	m ³ /h
Qmax	548	m ³ /h
Qboost	638	m ³ /h
SPEmin	50	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO		
PS	0.28	W
PI		
F	1.00	
EEL	56.90	
Qbep	359	m ³ /h
Pbep	384	Pa
Qboost	638	m ³ /h
Wbep	139	W
WL	3.50	W
Emiddle	115	lux
Lwa-SPEmax	63	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.