








<b>Versiune</b>	Quantum Pro - 84 cm - 600 m <sup>3</sup> /h
<b>Design</b>	Falmecc Lab Sisteme integrate de gătit  Sticlă ceramică neagră Automode (reglarea aspirației în funcție de gătit) Sistem de clapetă motorizat Colector de lichid vidabil Tehnologia Flex Surface Rama zonei de admisie din oțel negru mat cu tratament anti-zgârieturi
<b>Control</b>	Glisor tactil 9 niveluri de gătit + boost
<b>Modul</b>	
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru combinat Carbon.Zeo, regenerabil (opțional)
<b>Power</b>	Power level management from 2.8kW to 7.4kW
<b>Motor</b>	Motor fără perii
<b>Dimensions</b>	84 cm
<b>Cooking Functions</b>	Cronometru de sfârșit al gătitului pentru fiecare zonă Funcția de rechemare Funcția Keep Warm (44°) Detectarea automată a vasului Blocare control / siguranță pentru copii Funcția de pauză Funcția de punte dublă
<b>Notes</b>	
<b>Tensiune/frecvență</b>	7560 W 220-240V 50-60Hz
<b>Motor</b>	Motor fără perii 600 m <sup>3</sup> /h 495 m <sup>3</sup> /h I.E.C.61591 64 dB (A)re1pW I.E.C. 60704-2-13 A+
<b>Net Weight</b>	32.6 kg 26.5 kg 0.24 m <sup>3</sup> L 1055 x H 377 x P 610 mm







### Accesorii optionale

Code	Description
KACL.930	Filtru Carbon.Zeo subbază h100 mm
KACL.931	Filter replacement Carbon.Zeo for vertical outlet and under base kit h100 mm
KACL.951	Underbase Slim filter unit (h60mm)
KACL.952	Filter replacement (underbase Slim filter unit - h60mm)
KACL.955	Base grid (underbase Slim filter unit - h60mm)
KACL.155#NF	Cadru negru - 84 cm

<i>Viteza motorului</i>	1	5	9	10
	46	-	64	69
	170	310	390	495
	80	220	420	640
	11	32	74	131
<i>leșire aer</i>	220x90	220x90	220x90	220x90

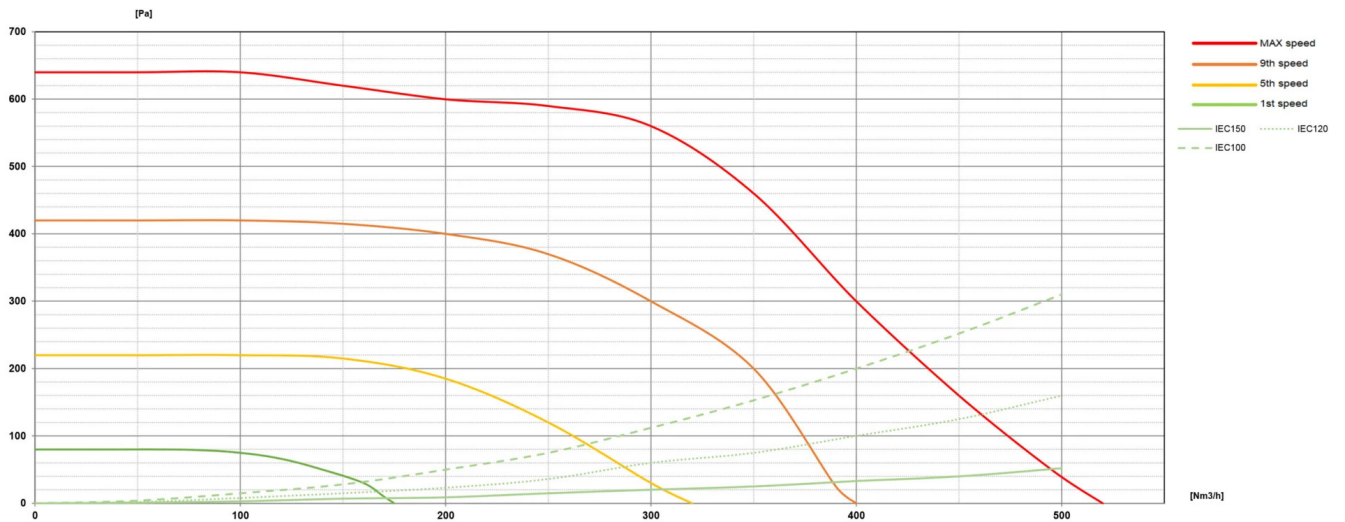

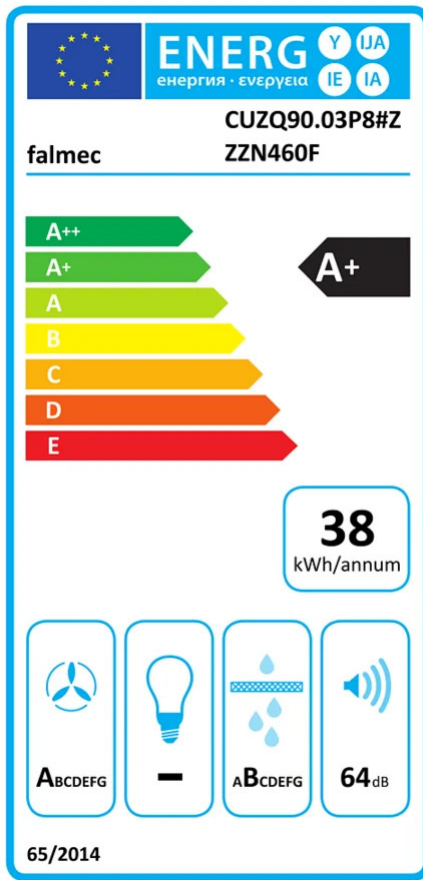

PF		
S	Falmecc Lab	
M	Quantum Pro - 84 cm - 600 m <sup>3</sup> /h	
AEC	38.30	kWh/a
EEC	A+	
FDE	33.10	
FDEC	A	
LE	0.00	
LEC		
GFE	87	
GFEC	B	
Qmin	170	m <sup>3</sup> /h
Qmax	390	m <sup>3</sup> /h
Qboost	495	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO		
PS	0.48	W
PI		
F	0.80	
EEL	43.80	
Qbep	267	m <sup>3</sup> /h
Pbep	584	Pa
Qboost	495	m <sup>3</sup> /h
Wbep	131	W

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.