



<b>Versiune</b>	Perete - 90 cm - negru - 600 m <sup>3</sup> /h
<b>Design</b>	Falmec Lab Design
<b>Control</b>	Customisable frontal part Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
<b>Modul</b>	
<b>Iluminat</b>	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 2x1,2 W - 2700 K / 5600 K
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon (opțional)
<b>Dimensions</b>	90 cm 52 cm 63 cm
<b>Notes</b>	
<b>Tensiune/frecvență</b>	230 W 220-240V 50-60Hz
<b>Plug</b>	Schuko
<b>Motor</b>	600 m <sup>3</sup> /h 580 m <sup>3</sup> /h I.E.C.61591 56 dB (A)re1pW I.E.C. 60704-2-13 B
<b>Net Weight</b>	18.8 kg 13.7 kg 0.27 m <sup>3</sup> L 995 x H 452 x P 595 mm




**Accessorii optionale**

<b>Code</b>	<b>Description</b>
103050107	Filtru de carbon dreptunghiular - Tip 3
KACL.512#N	Extension kit - black - h96 cm
KACL.864	Transportator pentru versiuni cu filtru (perete)
105080053	Telecomanda

Viteza motorului	1	2	3
	47	56	65
	240	350	580
	250	400	480
	130	160	200
leșire aer	150	150	150

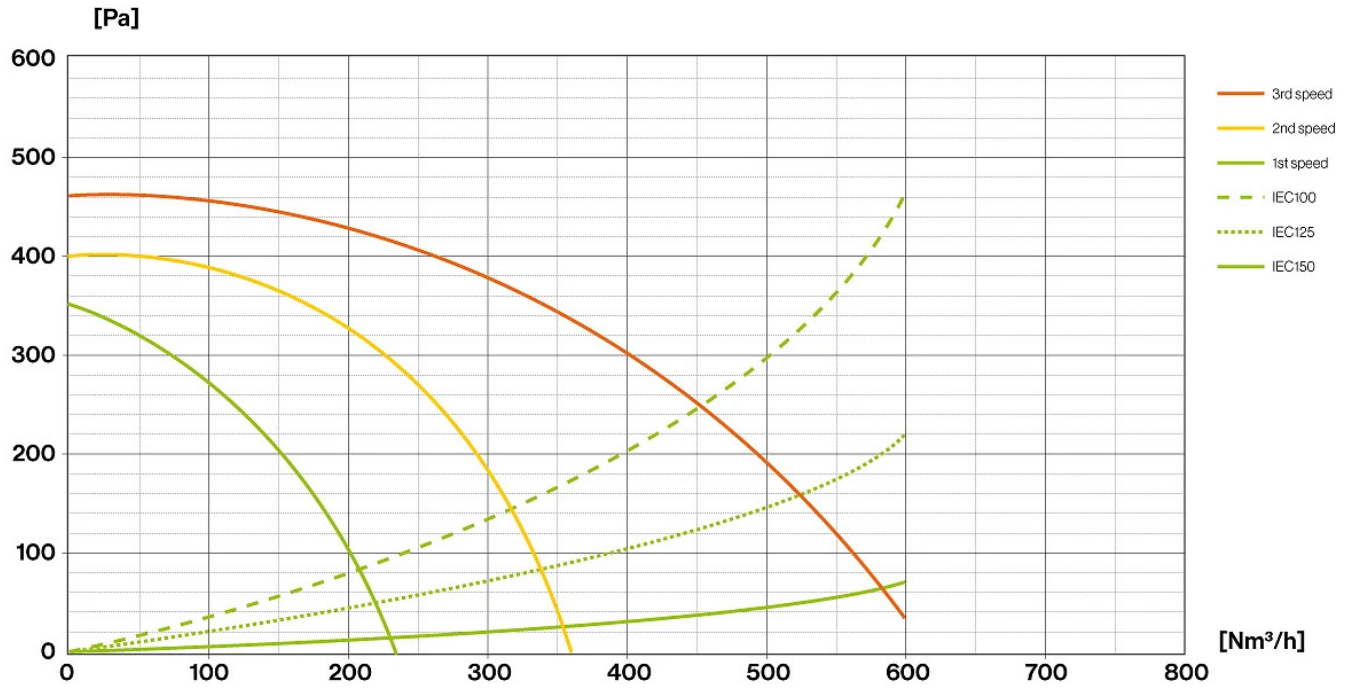

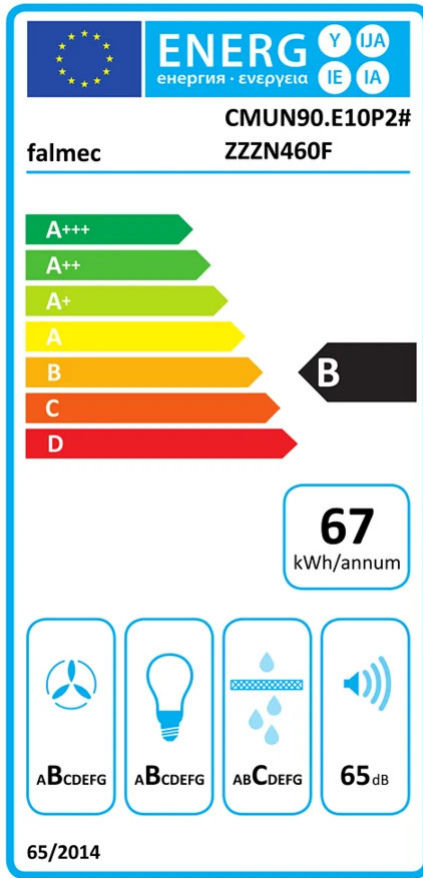

PF		
S	Falmecc Lab	
M	Perete - 90 cm - negro - 600 m3/h	
AEC	67.40	kWh/a
EEC	B	
FDE	23.20	
FDEC	B	
LE	27.90	
LEC	B	
GFE	80	
GFEC	C	
Qmin	240	m <sup>3</sup> /h
Qmax	580	m <sup>3</sup> /h
Qboost	580	m <sup>3</sup> /h
SPEmin	47	dBa
SPEmax	56	dBa
SPEboost		
PO	0	W
PS	0.48	W

PI		
F	1.20	
EEL	68.80	
Qbep	360	m <sup>3</sup> /h
Pbep	337	Pa
Qboost	580	m <sup>3</sup> /h
Wbep	145	W
WL	5.30	W
Emiddle	148	lux
Lwa-SPEmax	65	dBa

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.