



Versiune	Comfort - Built-in - 120 cm - Inox - 800 m ³ /h
Design	Falmecc Lab Design Oțel inoxidabil Scotch brite (AISI 430) Side sound-absorbing panels for noise reduction Suction chamber enlarged Rotatable tempered glass flap with integrated control Protective flaps for the edge of the wall unit
Control	Panou cu buton tactil
Modul	
Iluminat	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Strip Led 5,8 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerable Carbon.Zeo Microtech (opțional)
	280 W
Tensiune/frecvență	220-240V 50-60Hz
Motor	800 m ³ /h 652 m ³ /h I.E.C.61591 61 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	21.9 kg 17.4 kg 0.25 m ³ L 1295 x H 412 x P 465 mm




Accessorii optionale

Code	Description
KACL.1039	Filtru Regenerabil Carbon.Zeo Microtech

Accessorii optionale

Code	Description
KACL.1069	Ø150x370 - Tub izolat fonic (Virgola Touch Comfort/Virgola No-Drop Comfort)
KCVJN.01#3	Kit Chimney Virgola-Move H120 Stainless Steel
KCVJN.00#3	Telescopic chimney h 185 + h 185 - Virgola/Move
KACL.1059	Deflector de aer pentru ieşire D=150mm

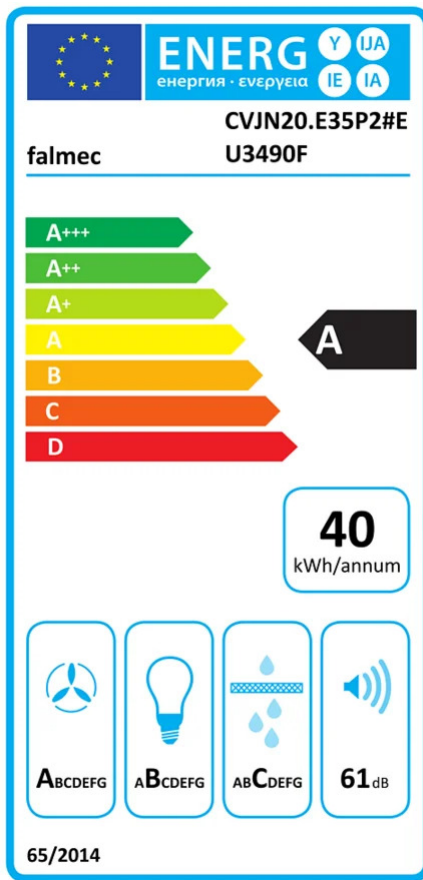

PF		
S	Falmecc Lab	
M	Comfort - Built-in - 120 cm - Inox - 800 m3/h	
AEC	39.90	kWh/a
EEC	A	
FDE	32.80	
FDEC	A	
LE	21.20	
LEC	B	
GFE	84	
GFEC	C	
Qmin	287	m ³ /h
Qmax	535	m ³ /h
Qboost	652	m ³ /h
SPEmin	50	dBa
SPEmax	61	dBa
SPEboost	65	dBa
PO		
PS	0.28	W
PI		
F	0.80	
EEL	46.60	
Qbep	411	m ³ /h
Pbep	351	Pa
Qboost	652	m ³ /h
Wbep	122	W
WL	5.80	W
Emiddle	123	lux
Lwa-SPEmax	61	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.