





| | |
|---------------------------|--|
| Versiune | Perete - 85 cm - negru - 600 m3/h |
| Design | Falmec Lab Design |
| | Versiune cu panou personalizabil Oțel vopsit în negru Deschidere față |
| Control | Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat |
| Modul | |
| Iluminat | Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 2x1,2 W - 2700 K / 5600 K |
| Filters | Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerable Carbon.Zeo Microtech (opțional) |
| Dimensions | 85 cm 52 cm 52 cm |
| Notes | Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024. Dimmable light from January 2025. |
| | 280 W |
| Tensiune/frecvență | 220-240V 50-60Hz |
| Motor | 600 m ³ /h 570 m ³ /h I.E.C.61591 61 dB (A)re1pW I.E.C. 60704-2-13 B |
| | 22.4 kg |
| Net Weight | 18.2 kg 0.19 m ³ L 950 x H 312 x P 655 mm |




Accessorii optionale

| Code | Description |
|-------------|---|
| KACL.1039 | Filtru Regenerabil Carbon.Zeo Microtech |
| KCCFN.00#N | Kit chimney Cover - Black |
| 105080053 | Telecomanda |

| Viteza motorului | 1 | 2 | 3 | 4 |
|------------------|-----|-----|-----|-----|
| | 45 | 55 | 61 | 67 |
| | 210 | 305 | 425 | 570 |
| | 410 | 600 | 720 | 740 |
| | 125 | 135 | 165 | 205 |
| leşire aer | 150 | 150 | 150 | 150 |

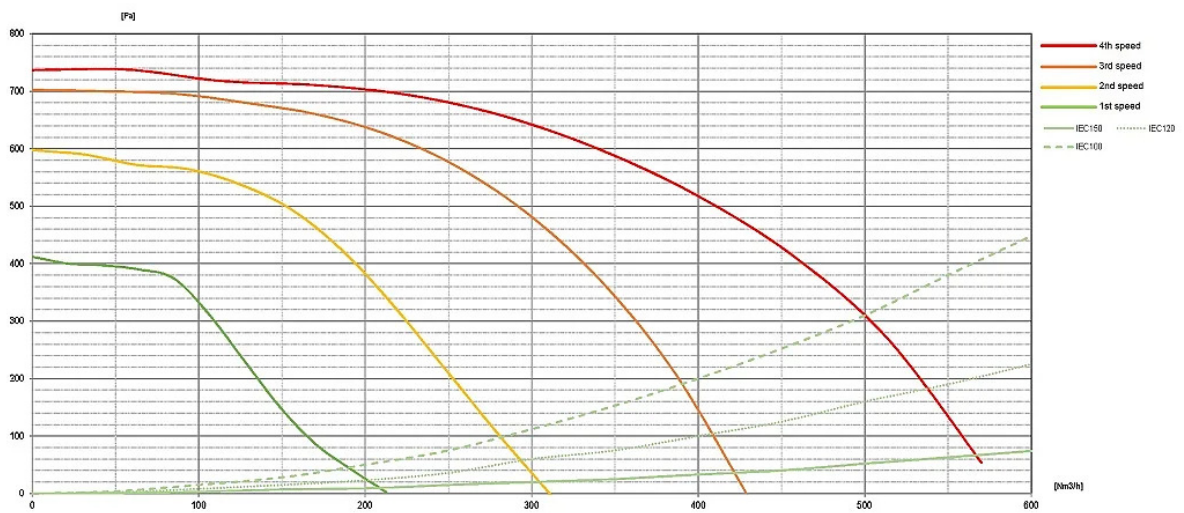

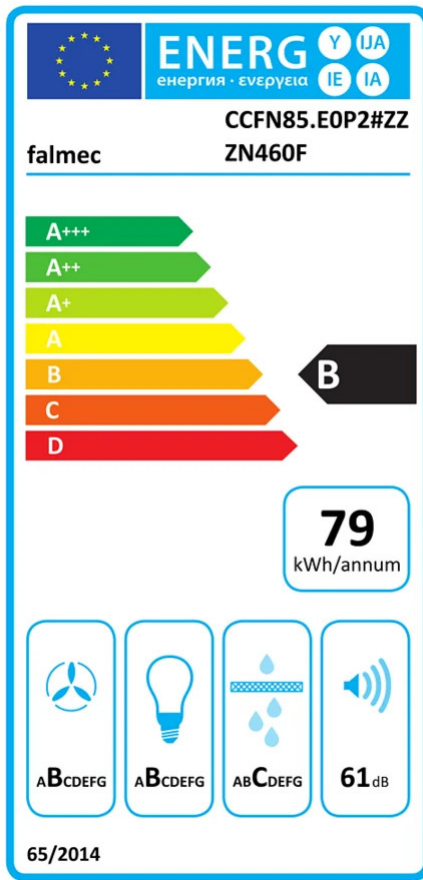

| PF | | |
|------------|-----------------------------------|-------------------|
| S | Falmec Lab | |
| M | Perete - 85 cm - negro - 600 m3/h | |
| AEC | 78.70 | kWh/a |
| EEC | B | |
| FDE | 27.90 | |
| FDEC | B | |
| LE | 21.60 | |
| LEC | B | |
| GFE | 82 | |
| GFEC | C | |
| Qmin | 210 | m ³ /h |
| Qmax | 425 | m ³ /h |
| Qboost | 570 | m ³ /h |
| SPEmin | 45 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 67 | dBa |
| PO | | |
| PS | 0.48 | W |
| PI | | |
| F | 1.00 | |
| EEL | 60.10 | |
| Qbep | 353 | m ³ /h |
| Pbep | 584 | Pa |
| Qboost | 570 | m ³ /h |
| Wbep | 205 | W |
| WL | 5.30 | W |
| Emiddle | 114 | lux |
| Lwa-SPEmax | 61 | dBa |

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.