

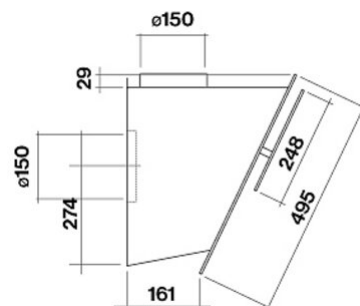


<b>Versiune</b>	EASY - alb - 55 cm - 800 m3/h
<b>Design</b>	Falmecc Lab Design
	Versiune cu panou personalizabil Deschidere față Zonă de aspirație dublă (față și jos) Conveyer for air outlet included
<b>Control</b>	Telecomandă (opțional) Dialogue system cu mod automat Panou cu buton tactil
<b>Modul</b>	Filtering
<b>Iluminat</b>	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 2x1,2 W - 2700 K / 5600 K
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerabil Carbon.Zeo Microtech
<b>Dimensions</b>	55 cm 52 cm 52 cm
	280 W
<b>Tensiune/frecvență</b>	220-240V 50-60Hz
<b>Motor</b>	800 m <sup>3</sup> /h 708 m <sup>3</sup> /h I.E.C.61591 65 dB (A)re1pW I.E.C. 60704-2-13 A
<b>Net Weight</b>	19.4 kg 15.2 kg 0.19 m <sup>3</sup> L 710 x H 452 x P 595 mm

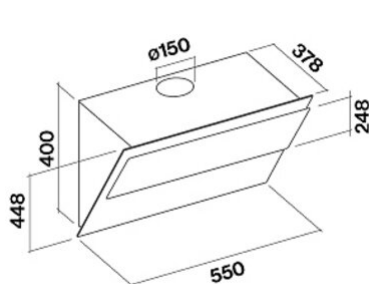

## **Accessorii optionale**

<i>Code</i>	<i>Description</i>
KACL.1055	Kit filtru regenerabil Carbon.Zeo Microtech
105080053	Telecomanda

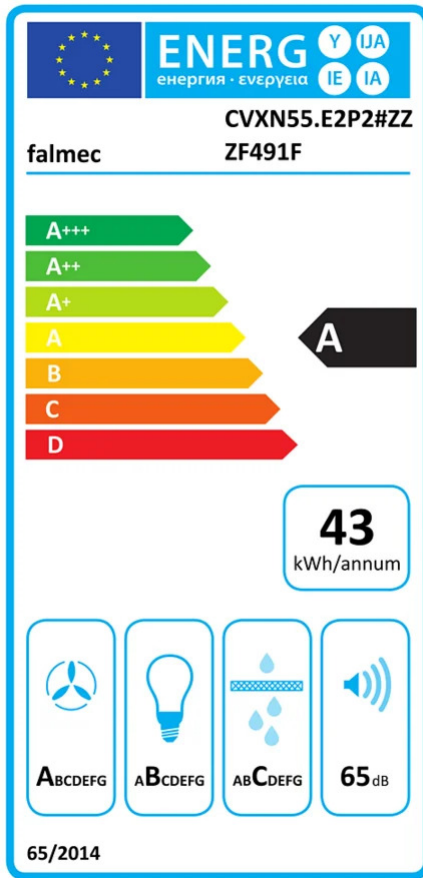

PF		
S	Falmec Lab	
M	EASY - alb - 55 cm - 800 m3/h	
AEC	43.00	kWh/a
EEC	A	
FDE	33.30	
FDEC	A	
LE	21.60	
LEC	B	
GFE	82	
GFEC	C	
Qmin	299	m <sup>3</sup> /h
Qmax	584	m <sup>3</sup> /h
Qboost	708	m <sup>3</sup> /h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO		
PS	0.48	W
PI		
F	0.80	
EEL	46.80	
Qbep	429	m <sup>3</sup> /h
Pbep	375	Pa
Qboost	708	m <sup>3</sup> /h
Wbep	134	W
WL	5.30	W
Emiddle	114	lux
Lwa-SPEmax	65	dBa

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.