



| | |
|---------------------------|---|
| Versiune | Evo - Island - 35 cm - White - 800 m ³ /h |
| Design | Falmec Lab Design |
| Control | Oțel cu finisaj alb Panou de control electronic |
| Modul | |
| Iluminat | Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 3x1,2 W - 2700 K / 5600 K |
| Filters | Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon (opțional) |
| Dimensions | 35 cm 52 cm 60 cm |
| Tensiune/frecvență | 280 W 220-240V 50-60Hz |
| Plug | Shuko |
| Motor | 800 m ³ /h 765 m ³ /h I.E.C.61591 65 dB (A)re1pW I.E.C. 60704-2-13 A |
| Net Weight | 26 kg 21 kg 0.3 m ³ L 995 x H 502 x P 595 mm |




Accesorii optionale

| Code | Description |
|-----------|---|
| 103050091 | Filtru de carbon rotund Ø170 mm - Tip 6 |

| Viteza motorului | 1 | 2 | 3 | 4 |
|------------------|-----|-----|-----|-----|
| | 48 | 55 | 65 | 69 |
| | 354 | 503 | 655 | 765 |
| | 415 | 460 | 480 | 500 |
| | 130 | 150 | 178 | 224 |
| leșire aer | 150 | 150 | 150 | 150 |

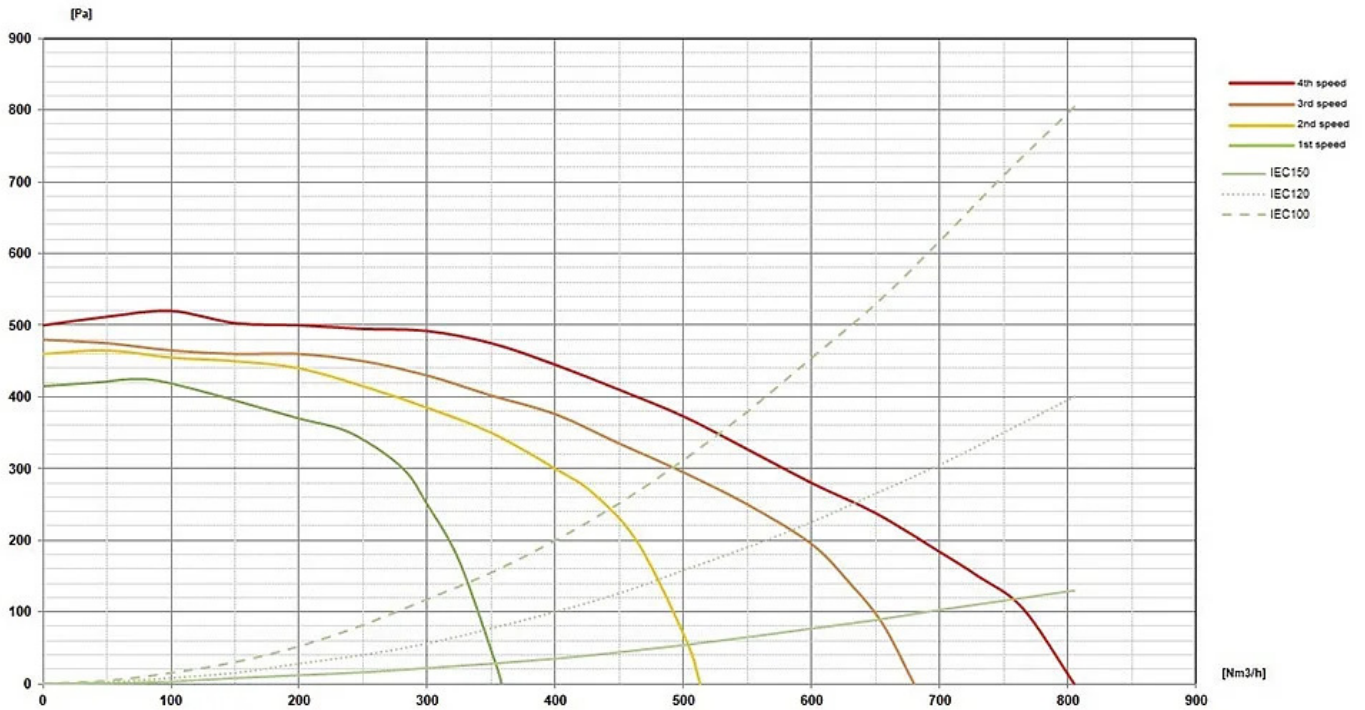

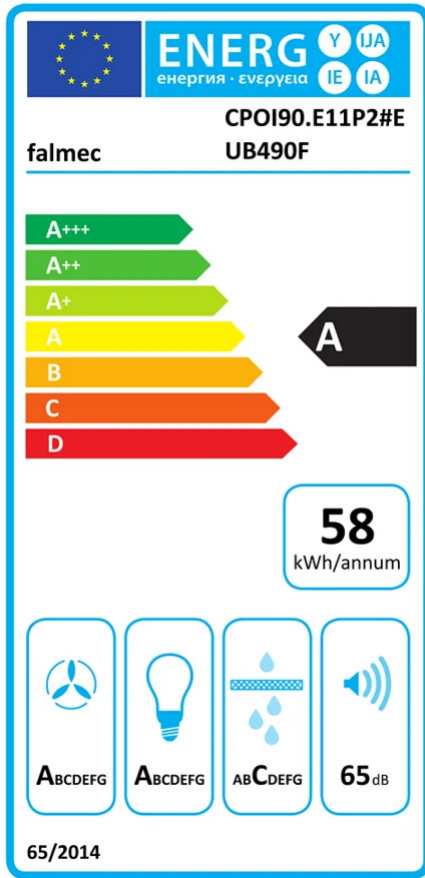

| PF | | |
|------------|---|-------------------|
| S | Falmecc Lab | |
| M | Evo - Island - 35 cm - White - 800 m3/h | |
| AEC | 57.60 | kWh/a |
| EEC | A | |
| FDE | 31.60 | |
| FDEC | A | |
| LE | 29.90 | |
| LEC | A | |
| GFE | 76 | |
| GFEC | C | |
| Qmin | 354 | m ³ /h |
| Qmax | 655 | m ³ /h |
| Qboost | 765 | m ³ /h |
| SPEmin | 48 | dBa |
| SPEmax | 65 | dBa |
| SPEboost | 69 | dBa |
| PO | | |
| PS | 0.28 | W |
| PI | | |
| F | 0.90 | |
| EEL | 53.50 | |
| Qbep | 449 | m ³ /h |
| Pbep | 411 | Pa |
| Qboost | 765 | m ³ /h |
| Wbep | 162 | W |
| WL | 6.00 | W |
| Emiddle | 179 | lux |
| Lwa-SPEmax | 65 | dBa |

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.