



Versiune	Perete 120 cm - 800 m ³ /h
Design	Falmec Lab Design
	Scotch brite stainless steel (AISI 304)
	Lumină ambientală LED
Control	Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
Modul	
Iluminat	Strip led (4000K)
Filters	Filtru superior, detașabil și lavabil Filtru de carbon
Dimensions	120 cm 52 cm 63 cm
Notes	Dialogue system from 03.04.24
	320 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	800 m ³ /h 680 m ³ /h I.E.C.61591 62 dB (A)re1pW I.E.C. 60704-2-13 C
Net Weight	29 kg 23 kg 0.34 m ³ L 1310 x H 432 x P 595 mm




Accesorii optionale

Code	Description
KACL.510#I	Extension H700 Wall - Inox
KACL.512#I	Extension H960 Wall - Inox
KACL.864	Transportator pentru versiuni cu filtru (perete)
105080053	Telecomanda
KACL.815	Șervețel de protecție pentru suprafețe din oțel inoxidabil (cutie 10 buc.)

Viteza motorului	1	2	3	4
	49	56	62	68
	280	370	480	680
	390	420	480	500
	132	153	175	215
leșire aer	150	150	150	150

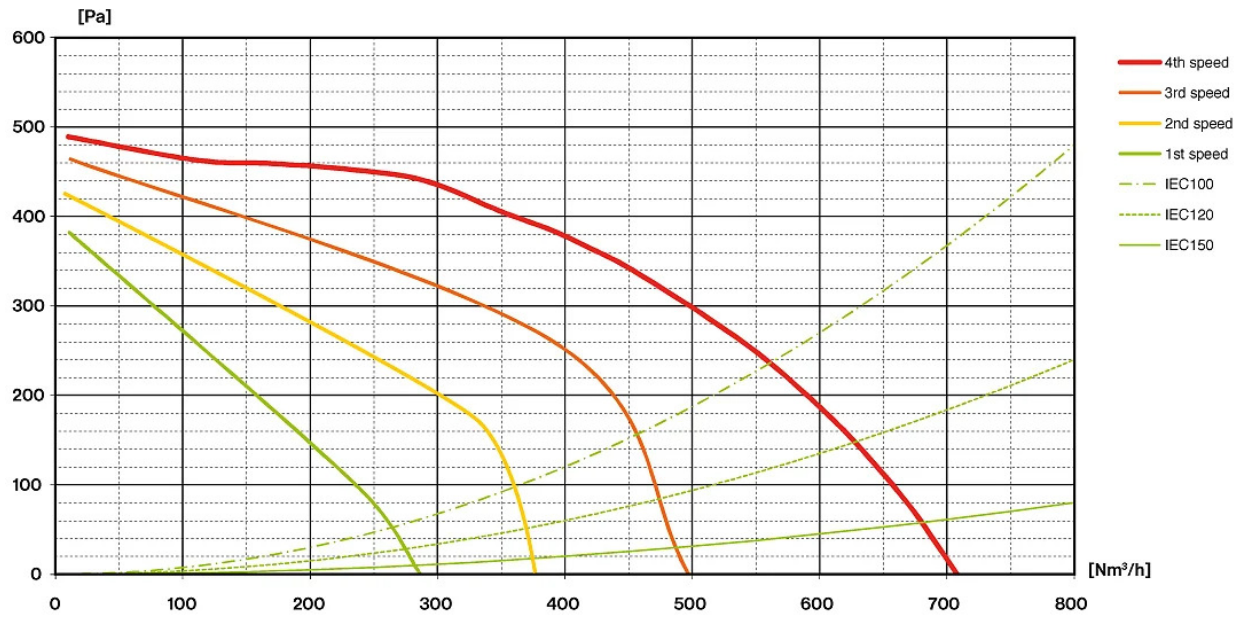

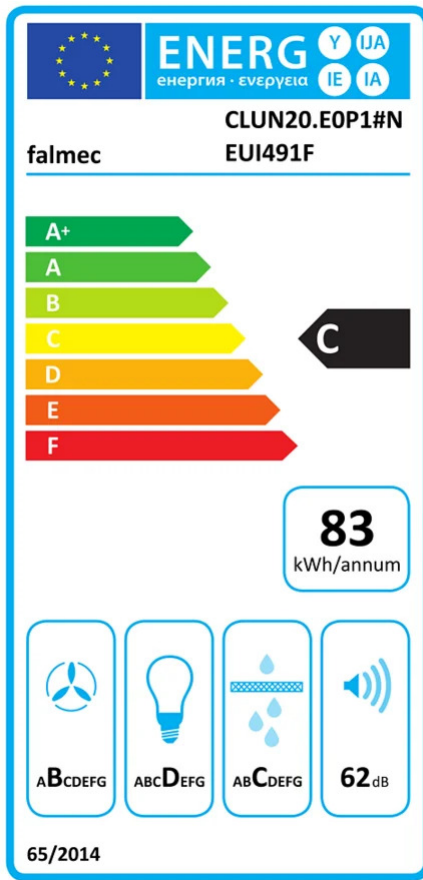

PF		
S	Falmec Lab	
M	Perete 120 cm - 800 m3/h	
AEC	82.70	kWh/a
EEC	C	
FDE	26.30	
FDEC	B	
LE	12.60	
LEC	D	
GFE	80	
GFEC	C	
Qmin	280	m ³ /h
Qmax	480	m ³ /h
Qboost	680	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	0	W
PS	0.48	W
PI		
F	1.10	
EEL	71.30	
Qbep	382	m ³ /h
Pbep	384	Pa
Qboost	680	m ³ /h
Wbep	155.1	W
WL	28.00	W
Emiddle	353	lux
Lwa-SPEmax	62	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.