



Versiune	Plus - Incorpat - 70 cm - alb - 800 m ³ /h
Design	Falmec Lab Design Oțel cu finisaj alb Aspirație perimetrală
Control	Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 2x2,3 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon (opțional)
Dimensions	70 cm 52 cm 62 cm
Tensiune/frecvență	280 W 220-240V 50-60Hz
Motor	800 m ³ /h 697 m ³ /h I.E.C.61591 64 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	12 kg 9.4 kg 0.12 m ³ L 875 x H 382 x P 390 mm

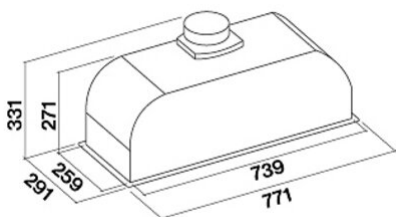


Accessorii optionale

<i>Code</i>	<i>Description</i>
103050091	Filtru de carbon rotund Ø170 mm - Tip 6
105080053	Telecomanda
KACL.1059	Deflector de aer pentru ieşire D=150mm

Viteza motorului	1	2	3	4
	51	59	64	69
	304	445	575	697
	430	470	500	510
	145	175	215	245
leşire aer	150	150	150	150

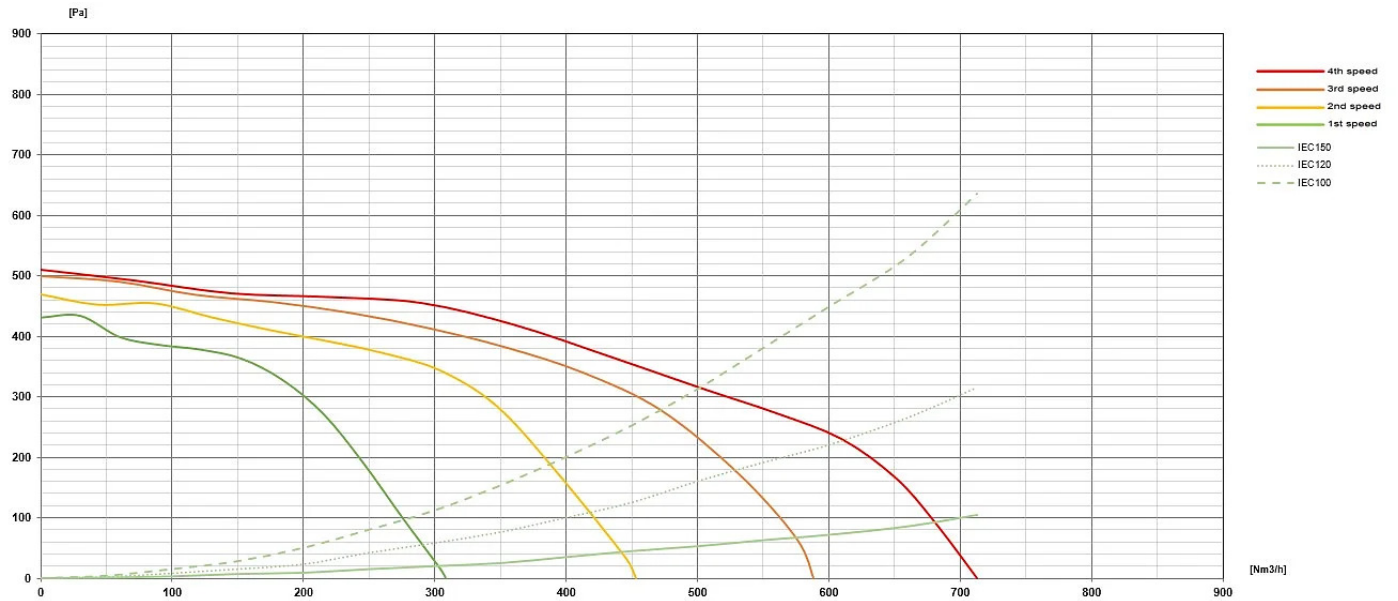

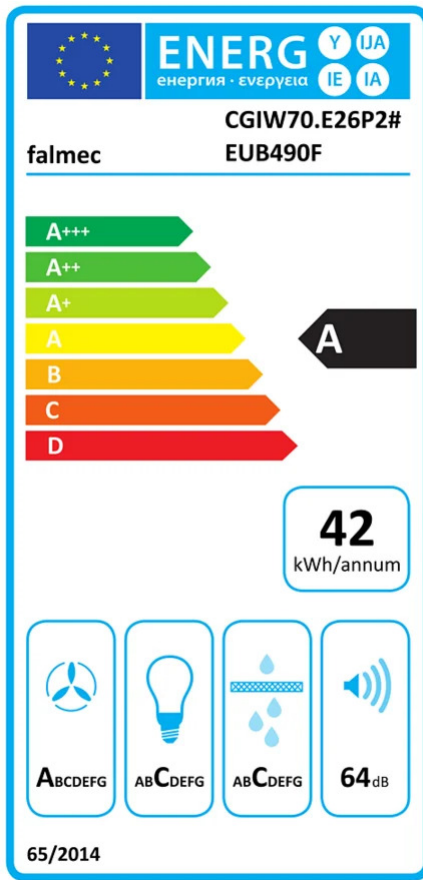

PF		
S	Falmec Lab	
M	Plus - Incorporat - 70 cm - alb - 800 m3/h	
AEC	42.40	kWh/a
EEC	A	
FDE	32.80	
FDEC	A	
LE	18.00	
LEC	C	
GFE	80	
GFEC	C	
Qmin	304	m ³ /h
Qmax	575	m ³ /h
Qboost	697	m ³ /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO		
PS	0.28	W
PI		
F	0.80	
EEL	46.30	
Qbep	417	m ³ /h
Pbep	379	Pa
Qboost	697	m ³ /h
Wbep	134	W
WL	4.50	W
Emiddle	81	lux
Lwa-SPEmax	64	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.