

Versiune

Worktop - 90 cm - Black - 800 m³/h

Design

Sticlă fumurie călită

Aluminiu cu finisaj negru mat

Panou superior personalizabil

Sistem sus/jos cu reglare pe înălțime



Control

Automatic cut-off timer

Panou cu buton tactil

Dialogue system cu mod automat

Telecomandă (opțional)

Modul

Iluminat

Dynamic LED Light (2700K - 5600K)

Led stripe 7 W - 2700 K / 5600 K

Filters

Filtru de grăsime din metal, detașabil și lavabil

Filtru Regenerable Carbon.Zeo Microtech (opțional)

Motor

Motor fără perii

Dimensions

90 cm

Tensiune/frecvență

180 W

220-240V 50-60Hz

Motor

Motor fără perii 800 m³/h

665 m³/h I.E.C.61591

64 dB (A)re1pW I.E.C. 60704-2-13

A++




Net Weight


39 kg

31.9 kg

0.37 m³

L 1070 x H 402 x P 870 mm

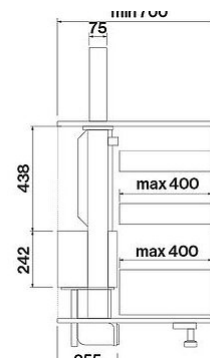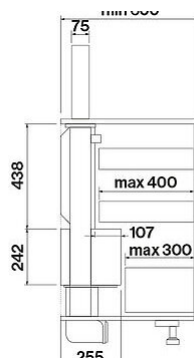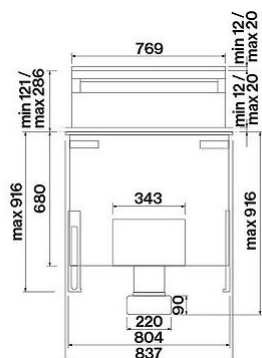

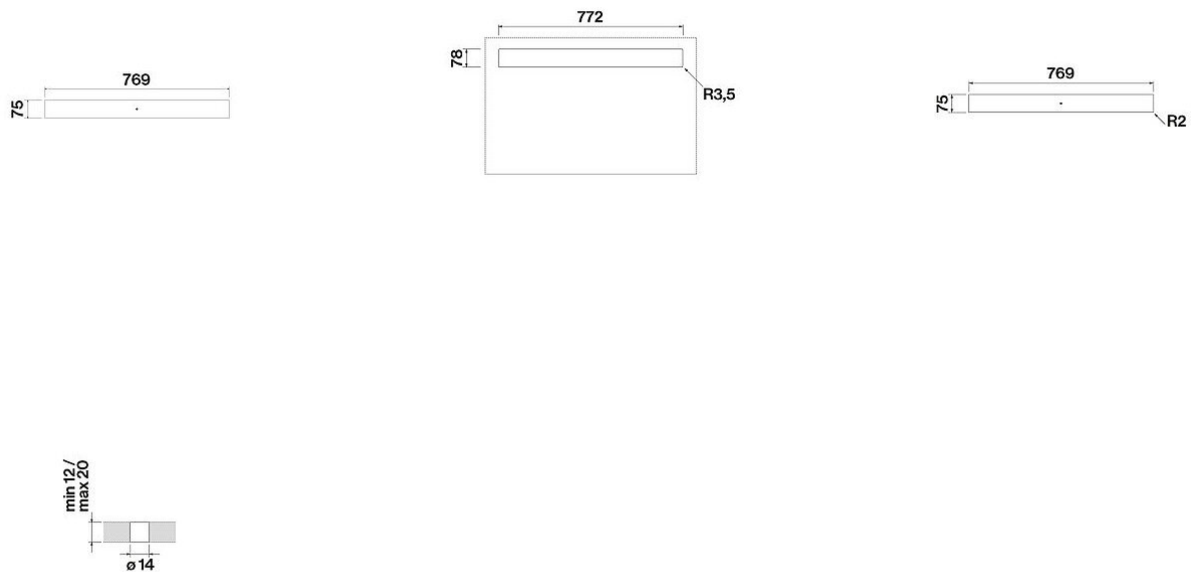

Accessorii optionale

Code	Description
KACL.1042	Filtru Regenerabil Carbon.Zeo Microtech (2x)
105080053	Telecomanda

PF		
S		
M	Worktop - 90 cm - Black - 800 m3/h	
AEC	28.10	kWh/a
EEC	A++	
FDE	40.30	
FDEC	A	
LE	0.30	
LEC	G	
GFE	87	
GFEC	B	
Qmin	435	m ³ /h
Qmax	605	m ³ /h
Qboost	665	m ³ /h
SPEmin	56	dBa
SPEmax	64	dBa
SPEboost	65	dBa
PO		
PS	0.48	W
PI		
F	0.50	
EEL	33.00	
Qbep	414	m ³ /h
Pbep	413	Pa
Qboost	665	m ³ /h
Wbep	119	W
WL	9.00	W
Emiddle	3	lux
Lwa-SPEmax	64	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.