


Versiune	Island - 90 cm - "Customisable" - 800 m ³ /h
Design	Falmec Lab Design Versiune cu panou personalizabil Versiune cu panou personalizabil Versiune cu panou personalizabil Aspirație perimetrală
Control	Panou de control electronic
Modul	
Iluminat	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 4x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon
Dimensions	90 cm 52 cm 60 cm
Notes	*A cover consisting of the glass accessory must be added to the stainless steel hood body. Alternatively, customised panels can be used. From 04.11.2024, dynamic and dimmable lighting is included.
Tensiune/frecvență	280 W 220-240V 50-60Hz
Plug	Shuko
Motor	800 m ³ /h 670 m ³ /h I.E.C. 61591 61 dB (A)re1pW I.E.C. 60704-2-13 B
Net Weight	45 kg 38 kg 0.62 m ³ L 1115 x H 507 x P 1100 mm







Accessorii optionale

Code	Description
KACL.815	Șervețel de protecție pentru suprafețe din oțel inoxidabil (cutie 10 buc.)
KACL.888#F	White glass - Island 90 cm
KACL.888#N	Black glass - Island 90 cm

Viteza motorului	1	2	3	4
	49	55	61	67
	270	360	470	670
	390	420	460	500
	134	156	180	215
leșire aer	150	150	150	150

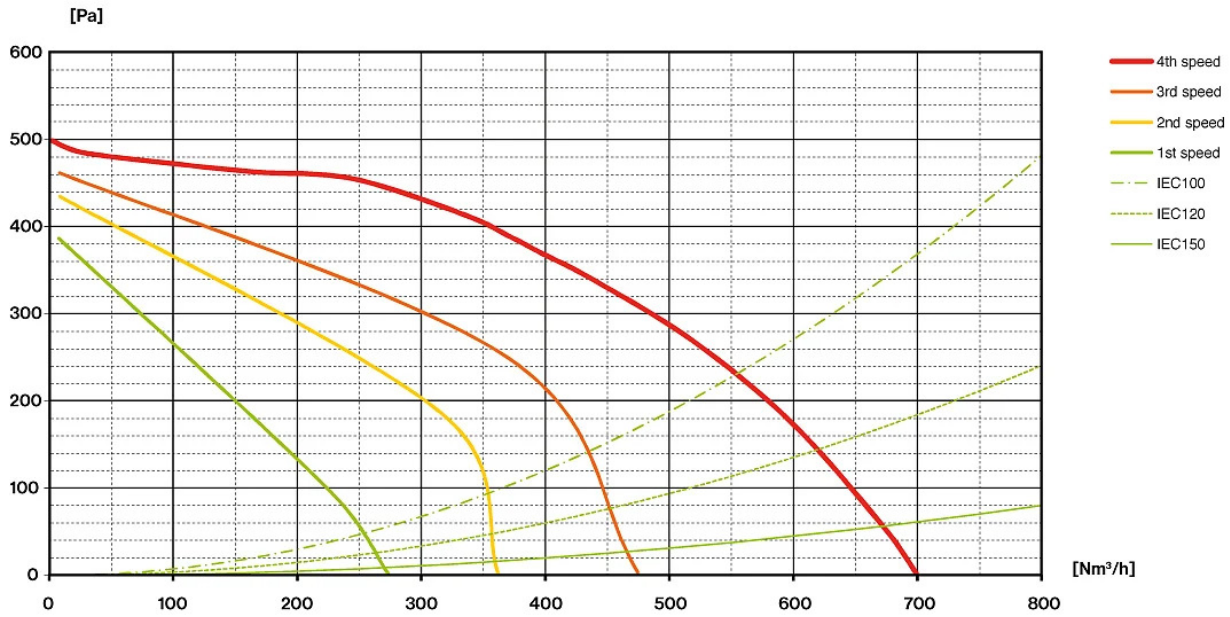

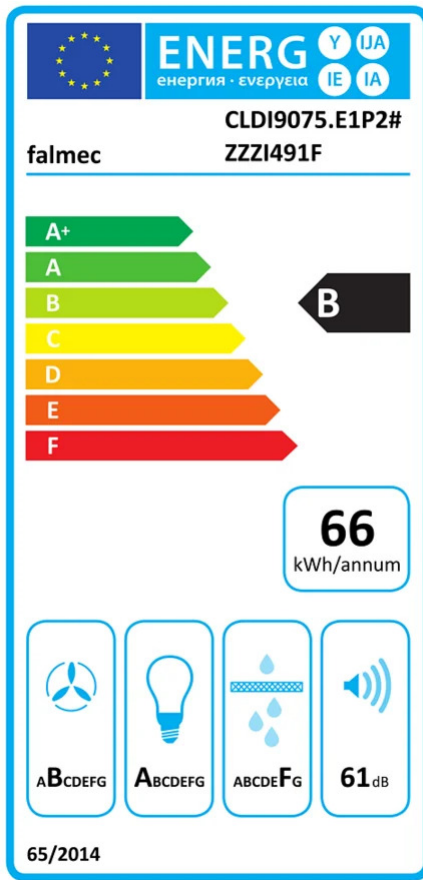

PF		
S	Falmecc Lab	
M	Island - 90 cm - "Customisable" - 800 m3/h	
AEC	65.60	kWh/a
EEC	B	
FDE	25.50	
FDEC	B	
LE	28.40	
LEC	A	
GFE	53	
GFEC	F	
Qmin	270	m ³ /h
Qmax	470	m ³ /h
Qboost	670	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	0	W
PS	0.48	W

PI		
F	1.10	
EEL	64.80	
Qbep	333	m ³ /h
Pbep	407	Pa
Qboost	670	m ³ /h
Wbep	147.7	W
WL	8.60	W
Emiddle	245	lux
Lwa-SPEmax	61	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.