



Versiune	Evo - Island - 35 cm - Inox - 800 m ³ /h
Design	Falmecc Lab Design
Control	Scotch brite stainless steel (AISI 304) Panou de control electronic
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 3x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detaşabil și lavabil Filtru de carbon (opțional)
Dimensions	35 cm 52 cm 60 cm
Tensiune/frecvență	280 W 220-240V 50-60Hz
Plug	Shuko
Motor	800 m ³ /h 765 m ³ /h I.E.C.61591 65 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	26 kg 21 kg 0.3 m ³ L 995 x H 502 x P 595 mm




Accesorii optionale

Code	Description
103050091	Filtru de carbon rotund Ø170 mm - Tip 6

Viteza motorului	1	2	3	4
	48	55	65	69
	354	503	655	765
	415	460	480	500
	130	150	178	224
leșire aer	150	150	150	150

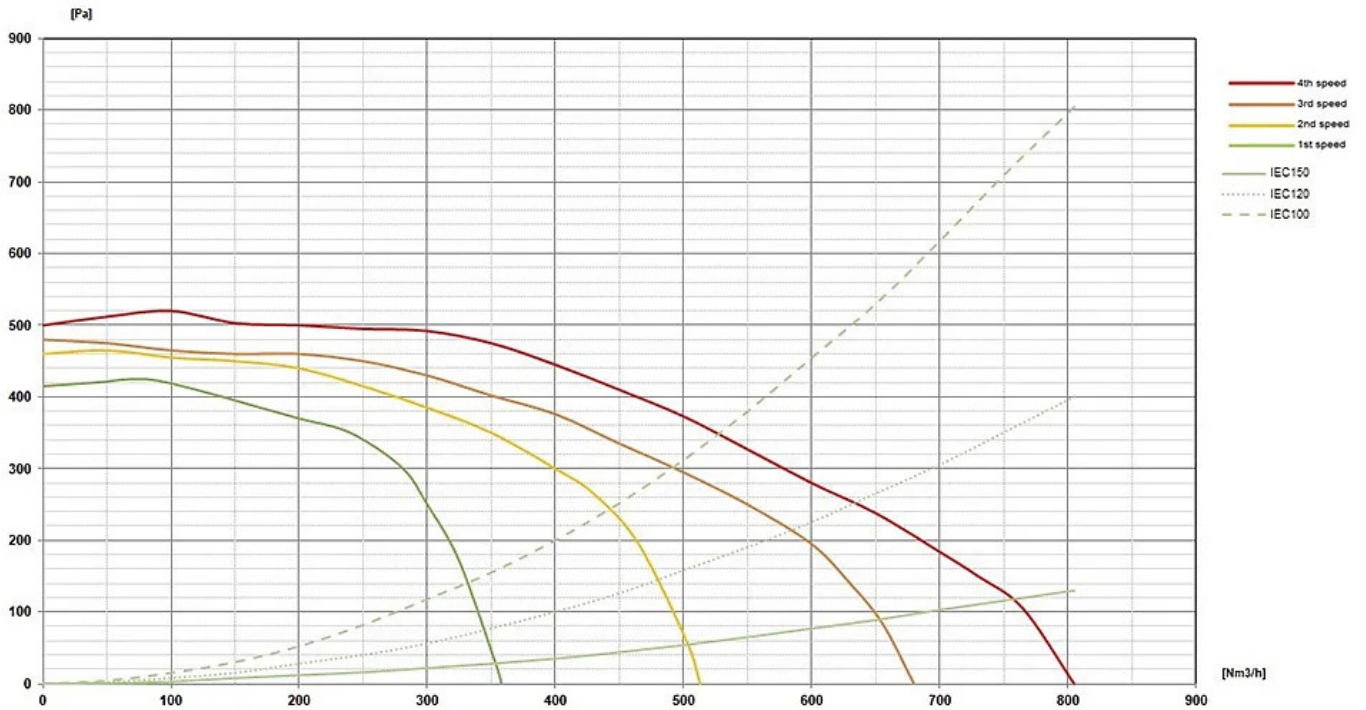

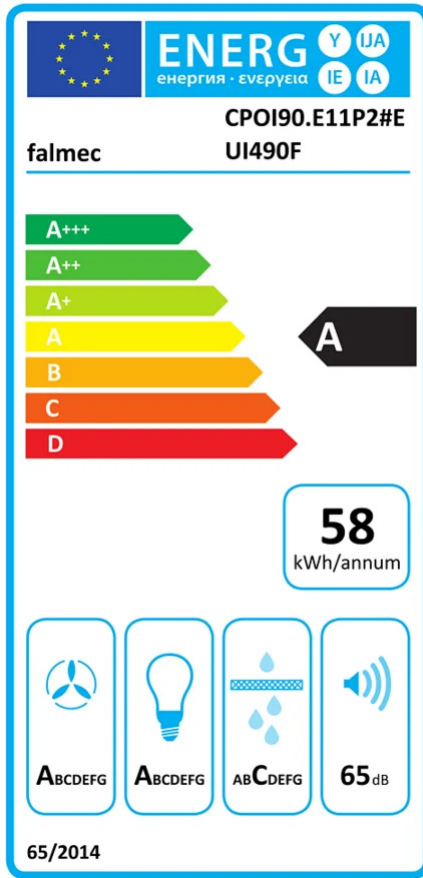

PF		
S	Falmecc Lab	
M	Evo - Island - 35 cm - Inox - 800 m3/h	
AEC	57.60	kWh/a
EEC	A	
FDE	31.60	
FDEC	A	
LE	29.90	
LEC	A	
GFE	76	
GFEC	C	
Qmin	354	m ³ /h
Qmax	655	m ³ /h
Qboost	765	m ³ /h
SPEmin	48	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO		
PS	0.28	W
PI		
F	0.90	
EEL	53.50	
Qbep	449	m ³ /h
Pbep	411	Pa
Qboost	765	m ³ /h
Wbep	162	W
WL	6.00	W
Emiddle	179	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.