

Versiune Plus - Perete - 90 cm - Inox - 600 m³/h
Design Falmec Lab
 Design

Control Panou de control electronic
 Telecomandă (opțional)
 Dialogue system cu mod automat

Modul

Illuminat Dimmable led lighting
 Dynamic LED Light (2700K - 5600K)
 Led 2x1,2 W - 2700 K / 5600 K


Filters Filtru de grăsime din metal, detașabil și lavabil
 Filtru de carbon (opțional)

Dimensions 90 cm
 63 cm
 52 cm

Tensiune/frecvență 230 W
 220-240V 50-60Hz

Motor 600 m³/h
 580 m³/h I.E.C.61591
 56 dB (A)re1pW I.E.C. 60704-2-13
 B

Net Weight 18.8 kg
 13.7 kg
 0.27 m³
 L 995 x H 452 x P 595 mm




Accessorii optionale


Code	Description
103050107	Filtru de carbon dreptunghiular - Tip 3
KACL.864	Transportator pentru versiuni cu filtru (perete)

Accessorii optionale

<i>Code</i>	<i>Description</i>
105080053	Telecomanda

Viteza motorului	1	2	3
	47	56	65
	240	350	580
	250	400	480
	130	160	200
leșire aer	150	150	150

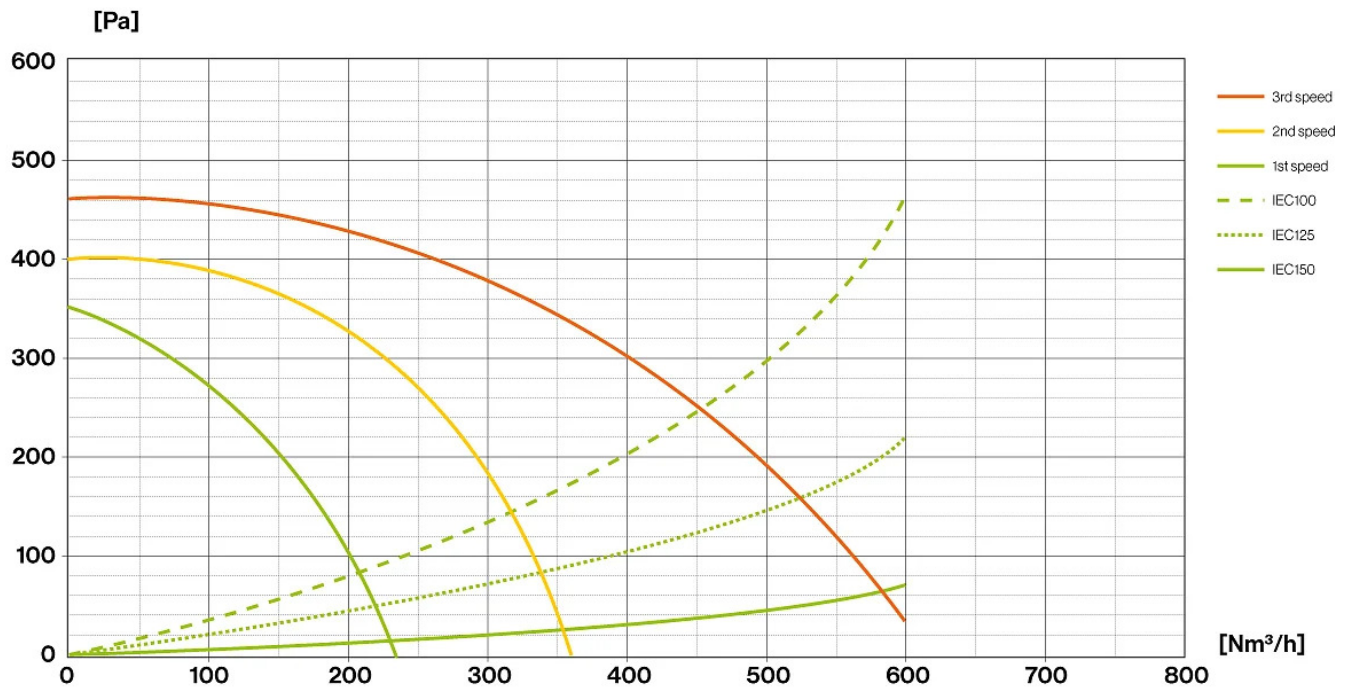

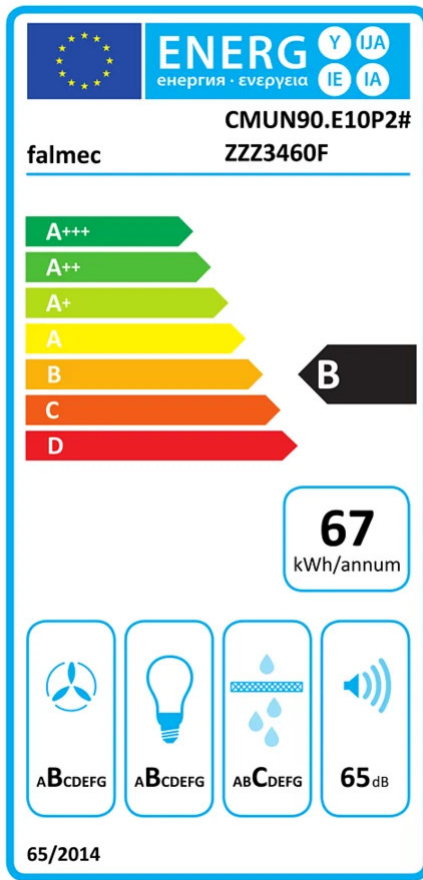

PF		
S	Falmecc Lab	
M	Plus - Perete - 90 cm - Inox - 600 m3/h	
AEC	67.40	kWh/a
EEC	B	
FDE	23.20	
FDEC	B	
LE	27.90	
LEC	B	
GFE	80	
GFEC	C	
Qmin	240	m ³ /h
Qmax	580	m ³ /h
Qboost	580	m ³ /h
SPEmin	47	dBa
SPEmax	56	dBa
SPEboost		
PO		
PS	0.48	W
PI		
F	1.20	
EEL	68.80	
Qbep	360	m ³ /h
Pbep	337	Pa
Qboost	580	m ³ /h
Wbep	145	W
WL	5.30	W
Emiddle	148	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.