




Versiune	Perete 90 cm - 950 m ³ /h
Design	Falmec Lab Professional
	Scotch brite stainless steel (AISI 304) Professional Buffle filters with liquid collector
Control	Panou de control electronic
Modul	
Masca pentru tubulatura	leșire din spate posibilă
Iluminat	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 3x1,2 W - 2700 K / 5600 K
Filters	Professional Baffle Filters
Dimensions	90 cm 52 cm 63 cm
Notes	From 04.11.2024 the dynamic and dimmable light is included.
	320 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	950 m ³ /h 860 m ³ /h I.E.C.61591 64 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	29 kg 25 kg 0.37 m ³ L 995 x H 622 x P 595 mm



Vedere din spate





Șemineu opțional

Accesorii optionale

Code	Description
KCQAN.00#1	Șemineu - Inox
KACL.815	Șervețel de protecție pentru suprafețe din oțel inoxidabil (cutie 10 buc.)

Viteza motorului	1	2	3	4
	53	58	64	69
	350	470	620	860
	500	540	560	600
	185	215	240	260
leșire aer	150	150	150	150

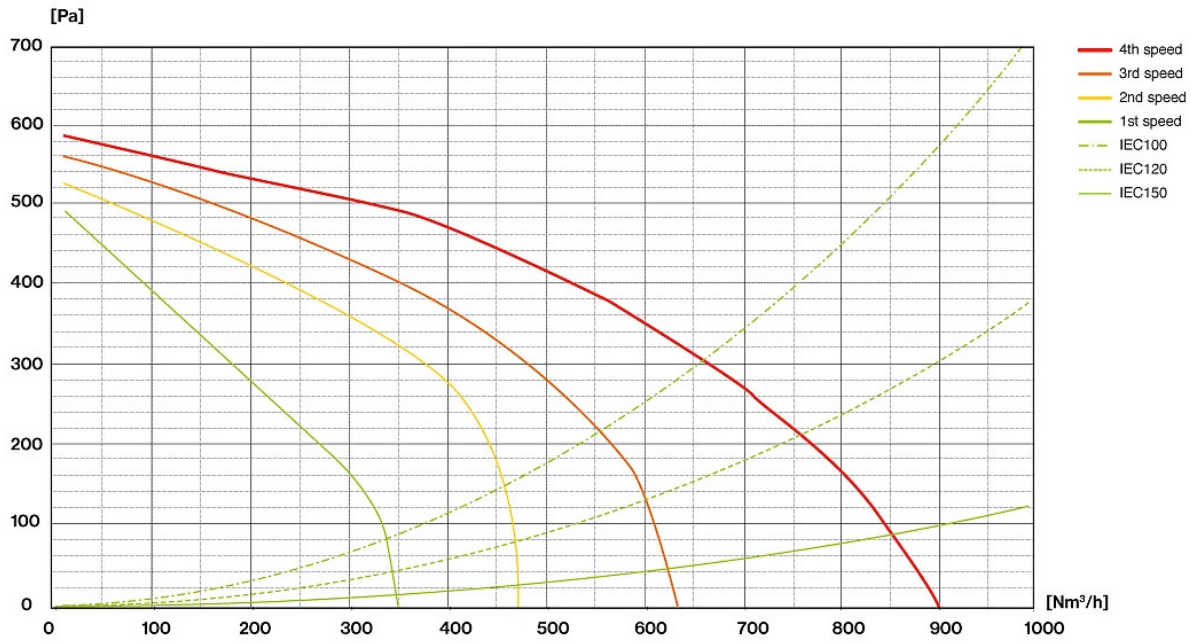

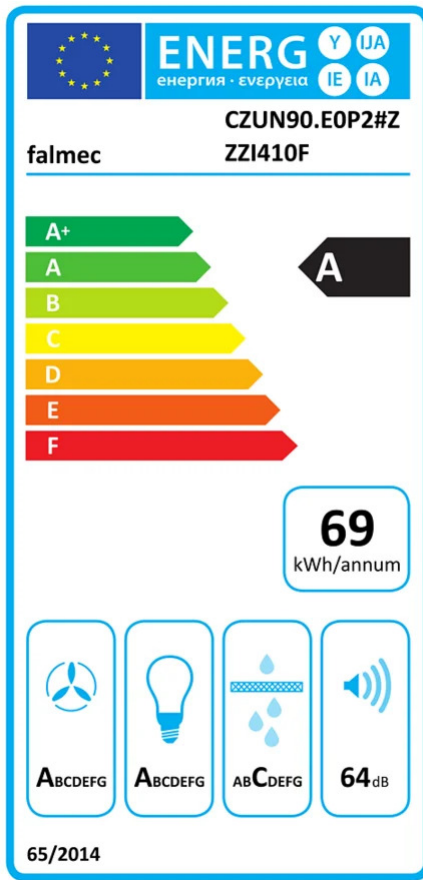

PF		
S	Falmec Lab	
M	Perete 90 cm - 950 m3/h	
AEC	68.80	kWh/a
EEC	A	
FDE	29.30	
FDEC	A	
LE	37.00	
LEC	A	
GFE	74	
GFEC	C	
Qmin	350	m ³ /h
Qmax	620	m ³ /h
Qboost	860	m ³ /h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	0	W
PS	0.48	W
PI		
F	0.90	
EEL	54.60	
Qbep	473	m ³ /h
Pbep	435	Pa
Qboost	860	m ³ /h
Wbep	195	W
WL	6.50	W
Emiddle	157	lux
Lwa-SPEmax	64	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.