


<b>Versiune</b>	Perete 60 cm - Alb - 800 m <sup>3</sup> /h
<b>Design</b>	Pio & Tito Toso Design  Alb deschidere față Margine cromată Iluminare cu LED pe corpul capotei și pe ușă Deschidere față
<b>Control</b>	Panou de control electronic
<b>Modul</b>	
<b>Masca pentru tubulatura</b>	Ieșire din spate posibilă Șemineu opțional
<b>Iluminat</b>	
<b>Filters</b>	Filtru superior, detașabil și lavabil Filtru de carbon
<b>Dimensions</b>	60 cm 52 cm 55 cm
<b>Notes</b>	RAL 9016/ Alb mat Codurile RAL trebuie sa fie considerate orientative, deoarece procesul de productie si materialele pot altera culorile.
	280 W
<b>Tensiune/frecvență</b>	220-240V 50-60Hz
<b>Plug</b>	Shuko
<b>Motor</b>	800 m <sup>3</sup> /h 750 m <sup>3</sup> /h I.E.C.61591 58 dB (A)re1pW I.E.C. 60704-2-13 A
<b>Net Weight</b>	20 kg 17 kg 0.2 m <sup>3</sup> L 710 x H 482 x P 595 mm







## Accessorii optionale

<i>Code</i>	<i>Description</i>
KCTCN.001#B	KIT CHIMNEY TAB 60-80 NOR. WHITE
KACL.1059	Deflector de aer pentru ieșire D=150mm

Viteza motorului	1	2	3	4
	46	53	58	66
	295	390	500	750
	390	440	490	510
	130	150	178	224
leșire aer	150	150	150	150

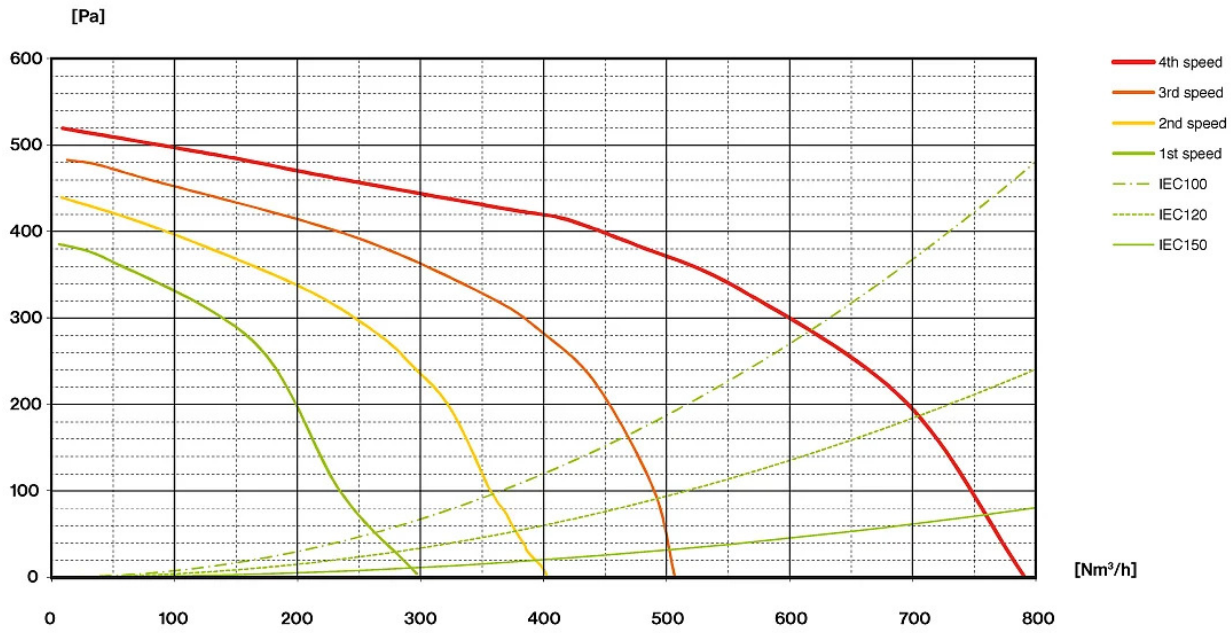

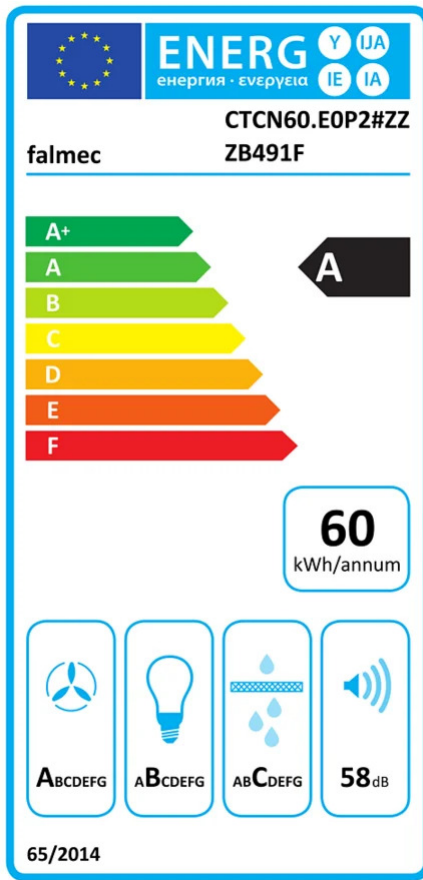

PF		
S	Pio & Tito Toso	
M	Perete 60 cm - Alb - 800 m3/h	
AEC	60.20	kWh/a
EEC	A	
FDE	29.80	
FDEC	A	
LE	24.90	
LEC	B	
GFE	82	
GFEC	C	
Qmin	295	m <sup>3</sup> /h
Qmax	500	m <sup>3</sup> /h
Qboost	750	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W
PI		
F	0.90	
EEL	54.60	
Qbep	432	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	750	m <sup>3</sup> /h
Wbep	164	W
WL	8.60	W
Emiddle	214	lux
Lwa-SPEmax	58	dBa

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.