



Versiune	Perete 90 cm - 800 m ³ /h
Design	Falmec Lab Design
Control	Scotch brite stainless steel (AISI 304) Panou de control electronic
Modul	
Iluminat	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 2x1,2 W - 2700 K / 5600 K
Filters	Filtru superior, detaşabil și lavabil Filtru de carbon
Dimensions	90 cm 52 cm 63 cm
Notes	From 04.11.2024 the dynamic and dimmable light is included.
Tensiune/frecvență	280 W 220-240V 50-60Hz
Plug	Shuko
Motor	800 m ³ /h 680 m ³ /h I.E.C.61591 62 dB (A)re1pW I.E.C. 60704-2-13 B
Net Weight	22 kg 17 kg 0.3 m ³ L 995 x H 512 x P 595 mm

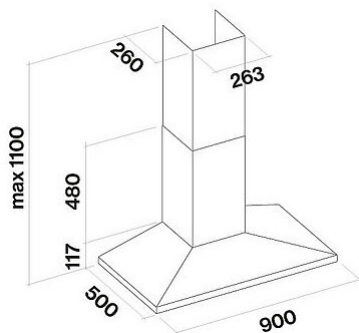


Accesorii optionale

Code	Description
KACL.510#I	Extension H700 Wall - Inox
KACL.512#I	Extension H960 Wall - Inox
KACL.864	Transportator pentru versiuni cu filtru (perete)
KACL.815	Șervețel de protecție pentru suprafețe din oțel inoxidabil (cutie 10 buc.)

Viteza motorului	1	2	3	4
	49	56	62	68
	280	370	480	680
	390	420	480	500
	132	153	175	215
leșire aer	150	150	150	150

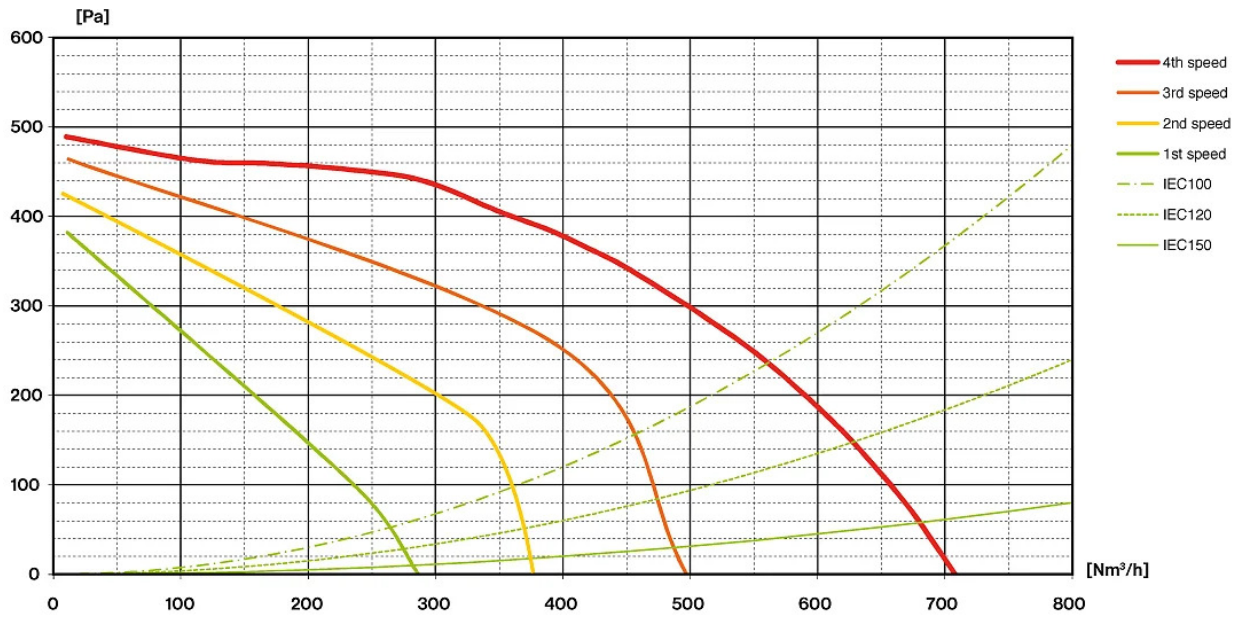

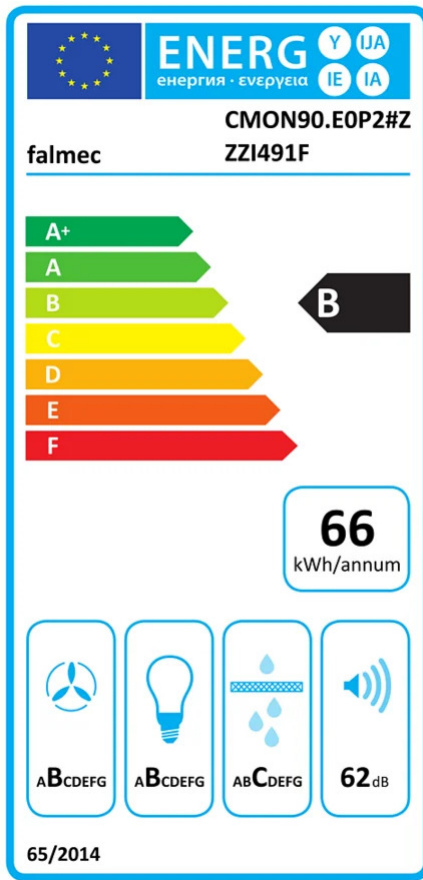

PF		
S	Falmec Lab	
M	Perete 90 cm - 800 m3/h	
AEC	66.10	kWh/a
EEC	B	
FDE	26.30	
FDEC	B	
LE	20.50	
LEC	B	
GFE	80	
GFEC	C	
Qmin	280	m ³ /h
Qmax	480	m ³ /h
Qboost	680	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	0	W
PS	0.48	W
PI		
F	1.10	
EEL	63.90	
Qbep	382	m ³ /h
Pbep	384	Pa
Qboost	680	m ³ /h
Wbep	155.1	W
WL	5.30	W
Emiddle	109	lux
Lwa-SPEmax	62	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.