


Versiune	Perete 60 cm - Negru - 800 m ³ /h
Design	Pio & Tito Toso Design Deschidere frontală neagră Margine cromată Iluminare cu LED pe corpul capotei și pe ușă Deschidere față
Control	Panou de control electronic
Modul	
Masca pentru tubulatura	Ieșire din spate posibilă Șemineu opțional
Iluminat	
Filters	Filtru superior, detașabil și lavabil Filtru de carbon
Dimensions	60 cm 52 cm 55 cm
Notes	RAL 9005 / Negru mat Codurile RAL trebuie să fie considerate orientative, deoarece procesul de producție și materialele pot altera culorile.
	280 W
Tensiune/frecvență	220-240V 50-60Hz
Plug	Shuko
Motor	800 m ³ /h 750 m ³ /h I.E.C.61591 58 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	20 kg 17 kg 0.2 m ³ L 710 x H 482 x P 595 mm




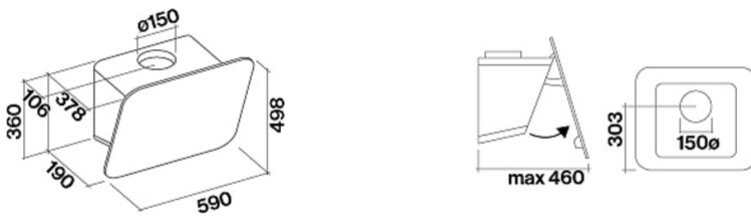


Accessorii optionale

Code	Description
KCTCN.001#N	KIT CHIMNEY TAB 60-80 NOR. BLACK
KACL.1059	Deflector de aer pentru ieşire D=150mm

Viteza motorului	1	2	3	4
	46	53	58	66
	295	390	500	750
	390	440	490	510
	130	150	178	224
leșire aer	150	150	150	150

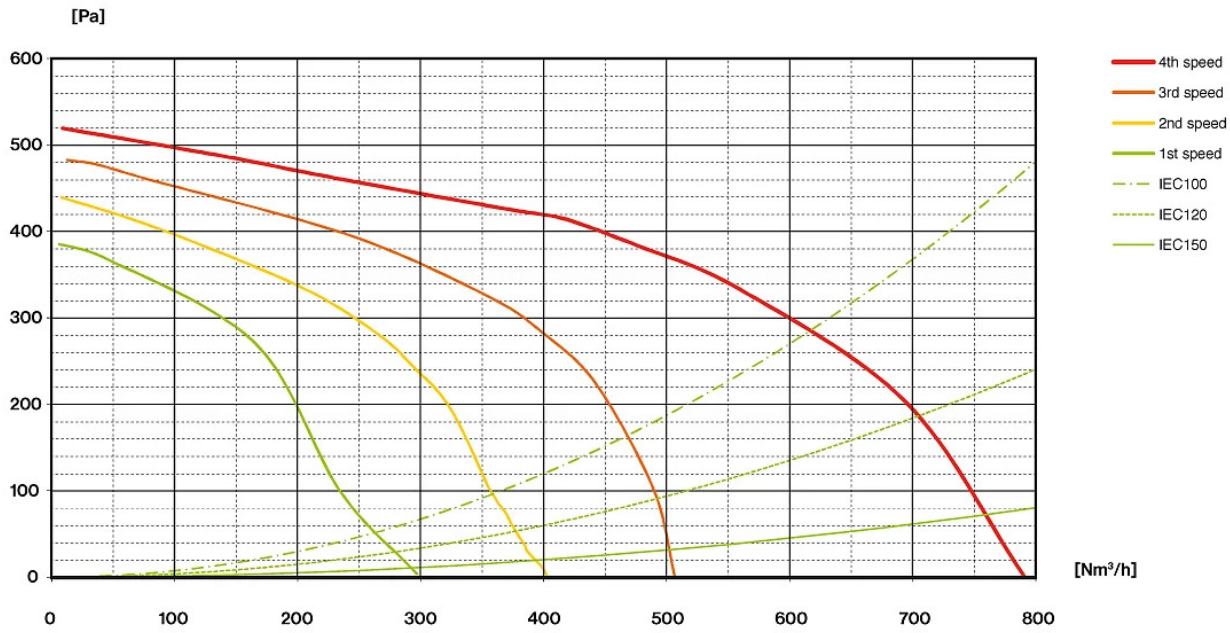

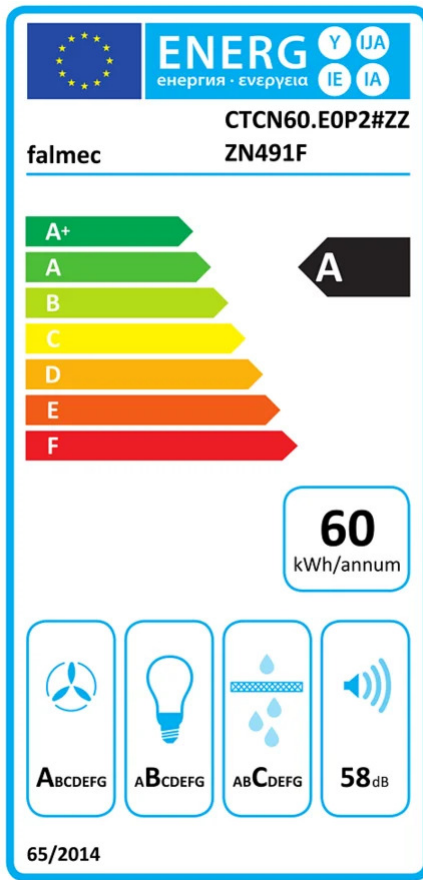

PF		
S	Pio & Tito Toso	
M	Perete 60 cm - Negru - 800 m3/h	
AEC	60.20	kWh/a
EEC	A	
FDE	29.80	
FDEC	A	
LE	24.90	
LEC	B	
GFE	82	
GFEC	C	
Qmin	295	m ³ /h
Qmax	500	m ³ /h
Qboost	750	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W
PI		
F	0.90	
EEL	54.60	
Qbep	432	m ³ /h
Pbep	407	Pa
Qboost	750	m ³ /h
Wbep	164	W
WL	8.60	W
Emiddle	214	lux
Lwa-SPEmax	58	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.