





Versiune	Perete - 85 cm - alb - 600 m ³ /h
Design	Falmec Lab Design
	Versiune cu panou personalizabil Oțel vopsit alb Deschidere față
Control	Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
Modul	
Iluminat	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 2x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerable Carbon.Zeo Microtech (opțional)
Dimensions	85 cm 52 cm 52 cm
Notes	Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024. Dimmable light from January 2025.
	280 W
Tensiune/frecvență	220-240V 50-60Hz
Motor	600 m ³ /h 570 m ³ /h I.E.C.61591 61 dB (A)re1pW I.E.C. 60704-2-13 B
	22.4 kg
Net Weight	18.2 kg 0.19 m ³ L 950 x H 312 x P 655 mm




Accessorii optionale

Code	Description
KACL.1039	Filtru Regenerabil Carbon.Zeo Microtech
KCCFN.00#B	Kit chimney Cover - White
105080053	Telecomanda

Viteza motorului	1	2	3	4
	45	55	61	67
	210	305	425	570
	410	600	720	740
	125	135	165	205
leşire aer	150	150	150	150

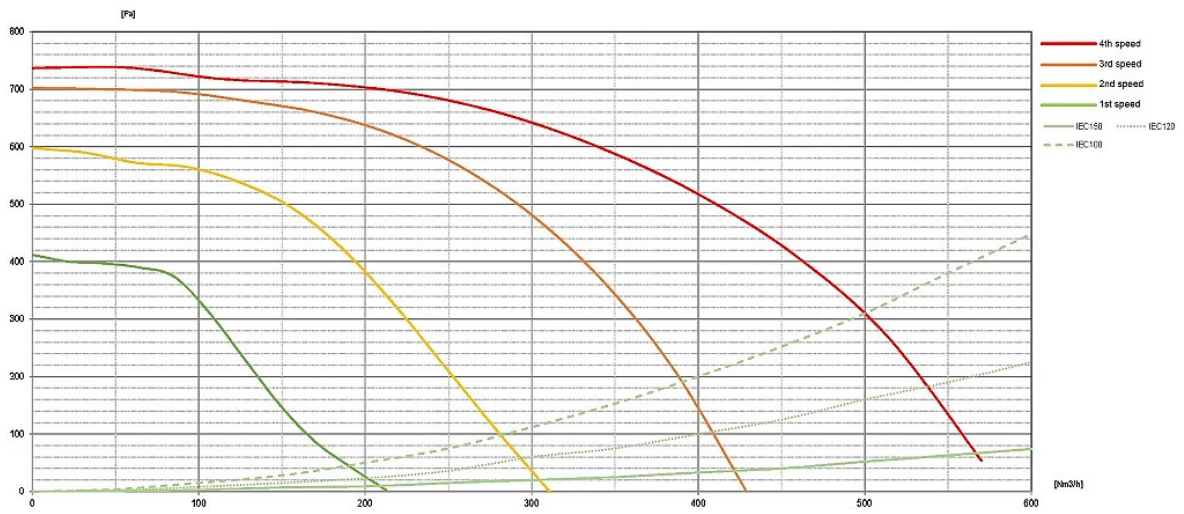

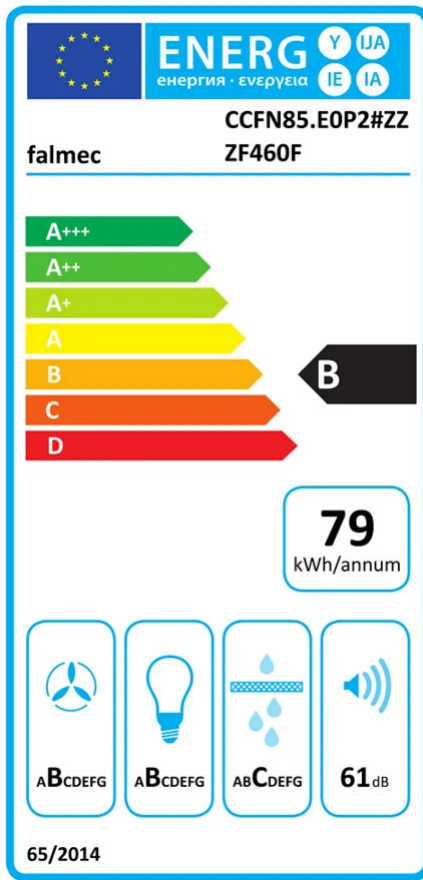

PF		
S	Falmec Lab	
M	Perete - 85 cm - alb - 600 m3/h	
AEC	78.70	kWh/a
EEC	B	
FDE	31.60	
FDEC	B	
LE	21.60	
LEC	B	
GFE	82	
GFEC	C	
Qmin	210	m ³ /h
Qmax	425	m ³ /h
Qboost	570	m ³ /h
SPEmin	45	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO		
PS	0.48	W
PI		
F	1.00	
EEL	60.10	
Qbep	353	m ³ /h
Pbep	584	Pa
Qboost	570	m ³ /h
Wbep	205	W
WL	5.30	W
Emiddle	114	lux
Lwa-SPEmax	61	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.