


Versiune	Plus Pro - Incorpat - 80 cm - Inox - 950 m ³ /h
Design	Falmec Lab Professional
	Scotch brite stainless steel (AISI 304) Professional Buffle filters with liquid collector
Control	Panou de control electronic Telecomandă (optional) Dialogue system cu mod automat
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Strip LED 2x1,8 W - 2700 K / 5600 K
Filters	Professional Baffle Filters
Dimensions	80 cm 52 cm 60 cm
	320 W
Tensiune/frecvență	220-240V 50-60Hz
Motor	950 m ³ /h 860 m ³ /h I.E.C.61591 64 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	15.4 kg 11.9 kg 0.16 m ³ L 915 x H 392 x P 455 mm

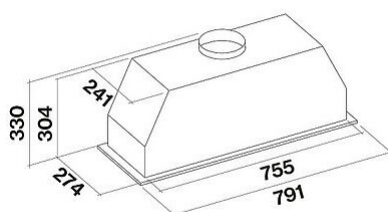


Accessorii optionale


Code	Description
105080053	Telecomanda

Accessorii optionale

<i>Code</i>	<i>Description</i>
KACL.1059	Deflector de aer pentru ieșire D=150mm

Viteza motorului	1	2	3	4
	53	58	64	69
	350	470	620	860
	500	540	560	600
	185	215	240	260
leșire aer	150	150	150	150

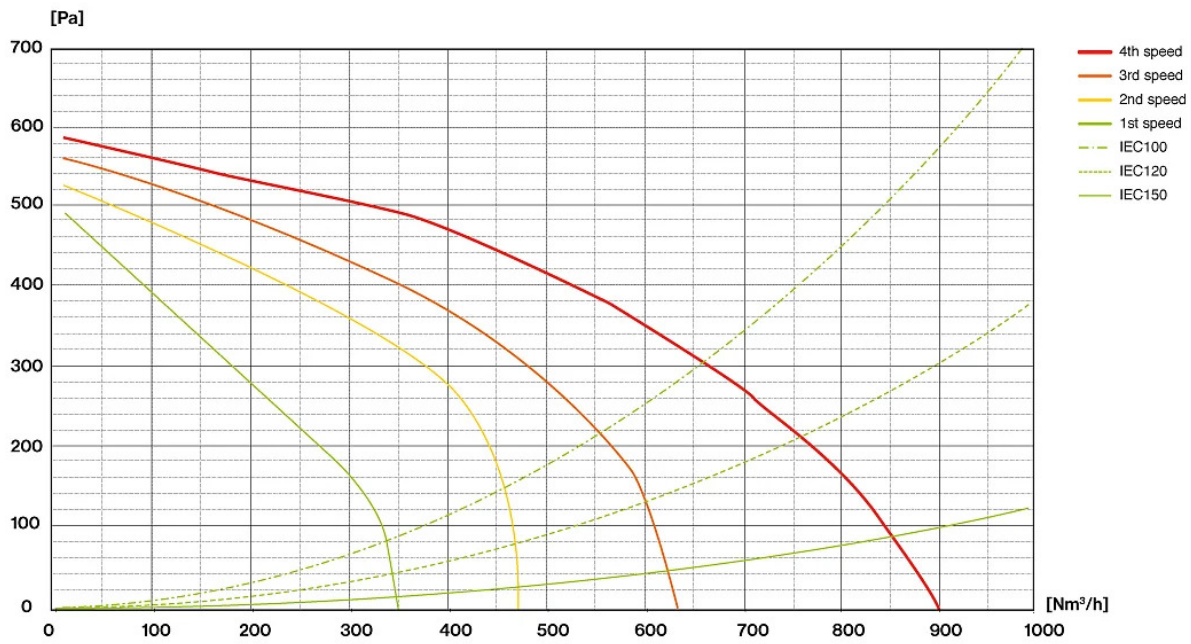

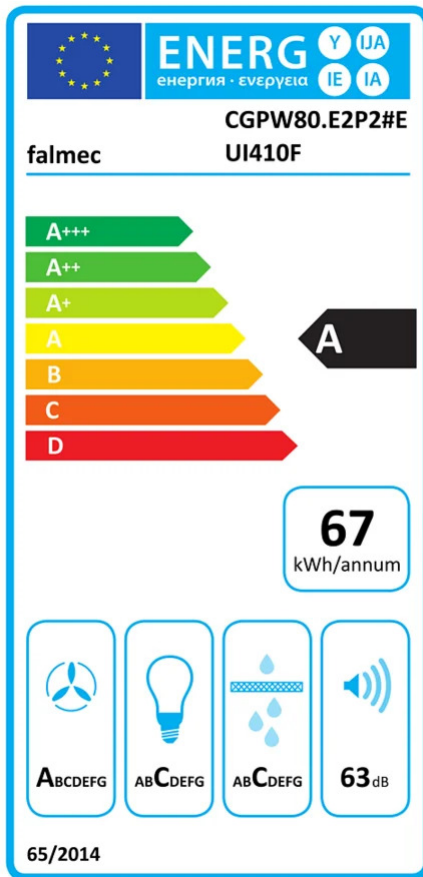

PF		
S	Falmecc Lab	
M	Plus Pro - Incorpat - 80 cm - Inox - 950 m3/h	
AEC	67.30	kWh/a
EEC	A	
FDE	29.30	
FDEC	A	
LE	18.00	
LEC	C	
GFE	74	
GFEC	C	
Qmin	350	m ³ /h
Qmax	620	m ³ /h
Qboost	860	m ³ /h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	70	dBa
PO		
PS	0.28	W
PI		
F	0.90	
EEL	53.80	
Qbep	473	m ³ /h
Pbep	435	Pa
Qboost	860	m ³ /h
Wbep	195	W
WL	4.50	W
Emiddle	81	lux
Lwa-SPEmax	63	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.