


<b>Versiune</b>	Perete 55 cm - Negru - 800 m <sup>3</sup> /h Design  Oțel vopsit în negru Sticlă neagră satinată Sticlă albă călită cu bandă centrală din oțel Deschidere față
<b>Control</b>	Panou de control electronic
<b>Modul</b>	
<b>Masca pentru tubulatura</b>	Ieșire din spate posibilă Șemineu opțional
<b>Iluminat</b>	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 2x1,2 W - 2700 K / 5600 K
<b>Filters</b>	Filtru de grăsime din metal, detașabil și lavabil Filtru combinat Carbon.Zeo, regenerabil (opțional) Filtru de carbon
<b>Dimensions</b>	55 cm 52 cm 52 cm
<b>Notes</b>	Dynamic and dimmable Led light from 03.04.24
<b>Tensiune/frecvență</b>	280 W 220-240V 50-60Hz
<b>Plug</b>	Shuko
<b>Motor</b>	800 m <sup>3</sup> /h 750 m <sup>3</sup> /h I.E.C.61591 58 dB (A)re1pW I.E.C. 60704-2-13 A
<b>Net Weight</b>	22 kg 17 kg 0.25 m <sup>3</sup> L 775 x H 452 x P 705 mm




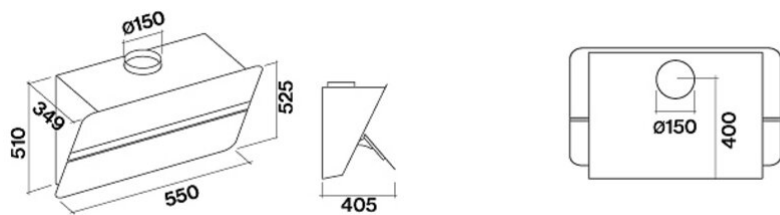


### Accessorii optionale

Code	Description
KACL.958#NF	External Carbon.Zeo filter unit for sloped hoods (Black)
KCQAN.00#I	Şemineu - Inox
KCQAN.00#N	Optional chimney (Black)
KACL.1059	Deflector de aer pentru ieşire D=150mm

Viteza motorului	1	2	3	4
	46	53	58	66
	295	390	500	750
	390	440	490	510
	130	150	178	224
leșire aer	150	150	150	150

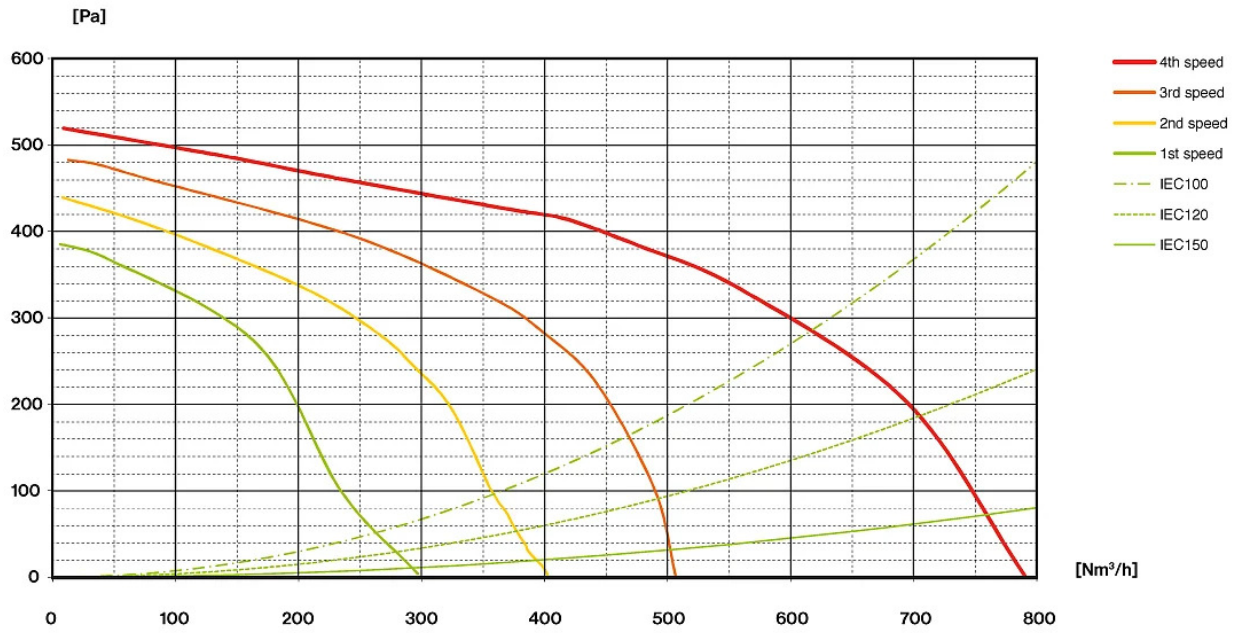

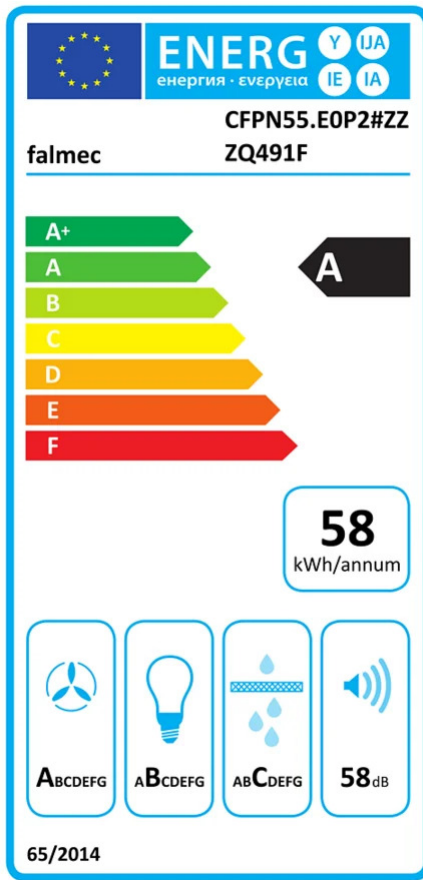

PF		
S		
M	Perete 55 cm - Negru - 800 m3/h	
AEC	57.70	kWh/a
EEC	A	
FDE	29.40	
FDEC	A	
LE	21.60	
LEC	B	
GFE	82	
GFEC	C	
Qmin	295	m <sup>3</sup> /h
Qmax	500	m <sup>3</sup> /h
Qboost	750	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W
PI		
F	0.90	
EEL	53.20	
Qbep	430	m <sup>3</sup> /h
Pbep	404	Pa
Qboost	750	m <sup>3</sup> /h
Wbep	164	W
WL	5.30	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.