

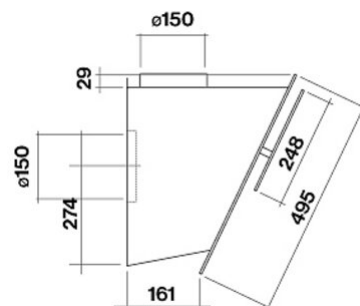


Versiune	EASY - negru - 55 cm - 800 m ³ /h
Design	Falmecc Lab Design
	Versiune cu panou personalizabil Deschidere față Zonă de aspirație dublă (față și jos) Conveyer for air outlet included
Control	Telecomandă (opțional) Dialogue system cu mod automat Panou cu buton tactil
Modul	Filtering
Iluminat	Dynamic LED Light (2700K - 5600K) Dimmable led lighting Led 2x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru Regenerabil Carbon.Zeo Microtech
Dimensions	55 cm 52 cm 52 cm
	280 W
Tensiune/frecvență	220-240V 50-60Hz
Motor	800 m ³ /h 708 m ³ /h I.E.C.61591 65 dB (A)re1pW I.E.C. 60704-2-13 A
Net Weight	19.4 kg 15.2 kg 0.19 m ³ L 710 x H 452 x P 595 mm

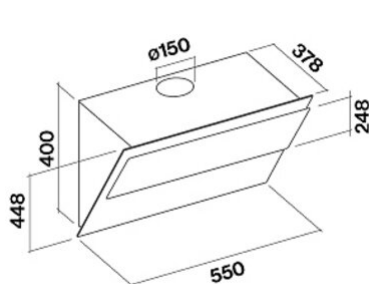

Accessorii optionale

<i>Code</i>	<i>Description</i>
KACL.1055	Kit filtru regenerabil Carbon.Zeo Microtech
105080053	Telecomanda

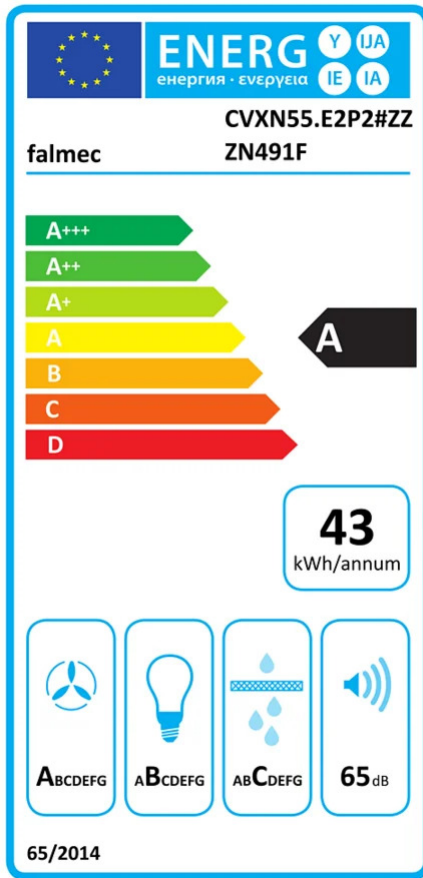

PF		
S	Falmecc Lab	
M	EASY - negru - 55 cm - 800 m3/h	
AEC	43.00	kWh/a
EEC	A	
FDE	33.30	
FDEC	A	
LE	21.60	
LEC	B	
GFE	82	
GFEC	C	
Qmin	299	m ³ /h
Qmax	584	m ³ /h
Qboost	708	m ³ /h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO		
PS	0.28	W
PI		
F	0.80	
EEL	46.80	
Qbep	429	m ³ /h
Pbep	375	Pa
Qboost	708	m ³ /h
Wbep	134	W
WL	5.30	W
Emiddle	114	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.