



Versiune	Perete - 60 cm - negru - 600 m ³ /h
Design	Falmecc Lab Design
Control	Customisable frontal part Panou de control electronic Telecomandă (opțional) Dialogue system cu mod automat
Modul	
Iluminat	Dimmable led lighting Dynamic LED Light (2700K - 5600K) Led 2x1,2 W - 2700 K / 5600 K
Filters	Filtru de grăsime din metal, detașabil și lavabil Filtru de carbon (opțional)
Dimensions	60 cm 52 cm 63 cm
Notes	
Tensiune/frecvență	230 W 220-240V 50-60Hz
Plug	Schuko
Motor	600 m ³ /h 580 m ³ /h I.E.C.61591 56 dB (A)re1pW I.E.C. 60704-2-13 B
Net Weight	15.4 kg 12 kg 0.19 m ³ L 710 x H 452 x P 595 mm

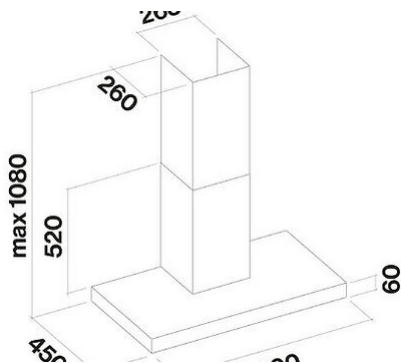


Accessorii optionale

Code	Description
103050107	Filtru de carbon dreptunghiular - Tip 3
KACL.512#N	Extension kit - black - h96 cm
KACL.864	Transportator pentru versiuni cu filtru (perete)
105080053	Telecomanda

Viteza motorului	1	2	3
	47	56	65
	240	350	580
	250	400	480
	130	160	200
leșire aer	150	150	150

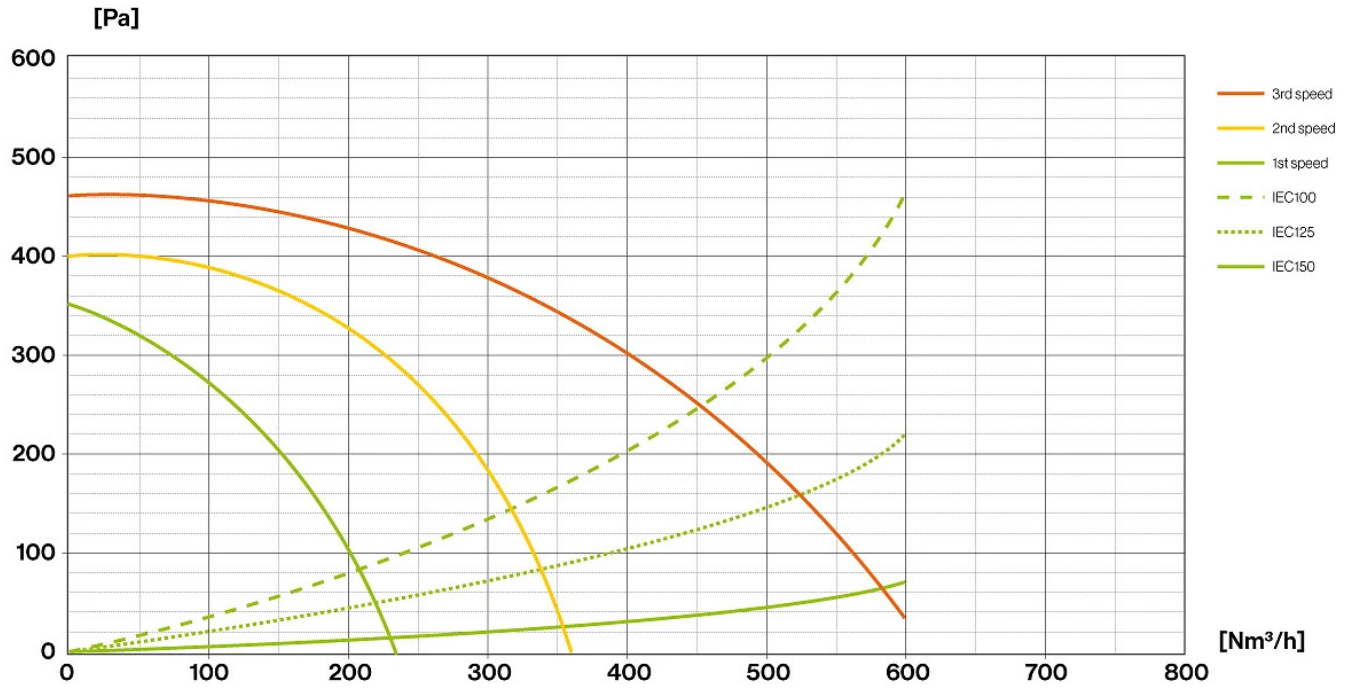

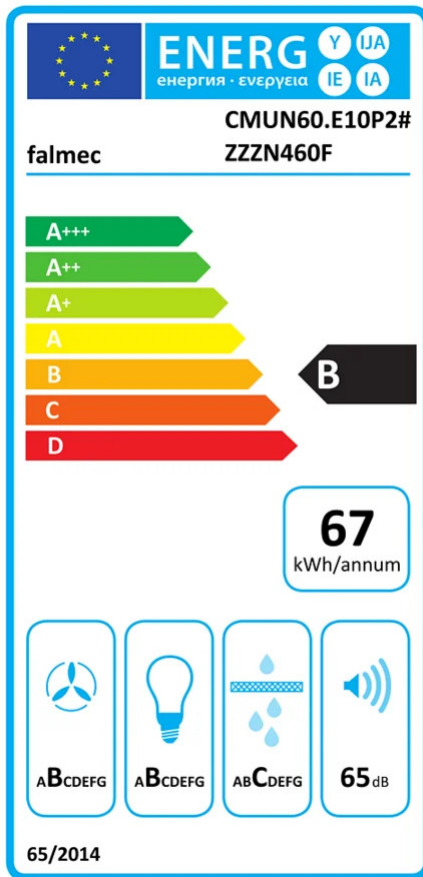

PF		
S	Falmec Lab	
M	Perete - 60 cm - negro - 600 m ³ /h	
AEC	67.40	kWh/a
EEC	B	
FDE	23.20	
FDEC	B	
LE	27.90	
LEC	B	
GFE	80	
GFEC	C	
Qmin	240	m ³ /h
Qmax	580	m ³ /h
Qboost	580	m ³ /h
SPEmin	47	dBa
SPEmax	56	dBa
SPEboost		
PO		
PS	0.48	W
PI		
F	1.20	
EEL	68.80	
Qbep	360	m ³ /h
Pbep	337	Pa
Qboost	580	m ³ /h
Wbep	145	W
WL	5.30	W
Emiddle	148	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.